


# ONE DRIP EDGE

COLOR PVC COATED WITH FACTORY-APPLIED SARNAFIL PVC FLASHING MEMBRANE

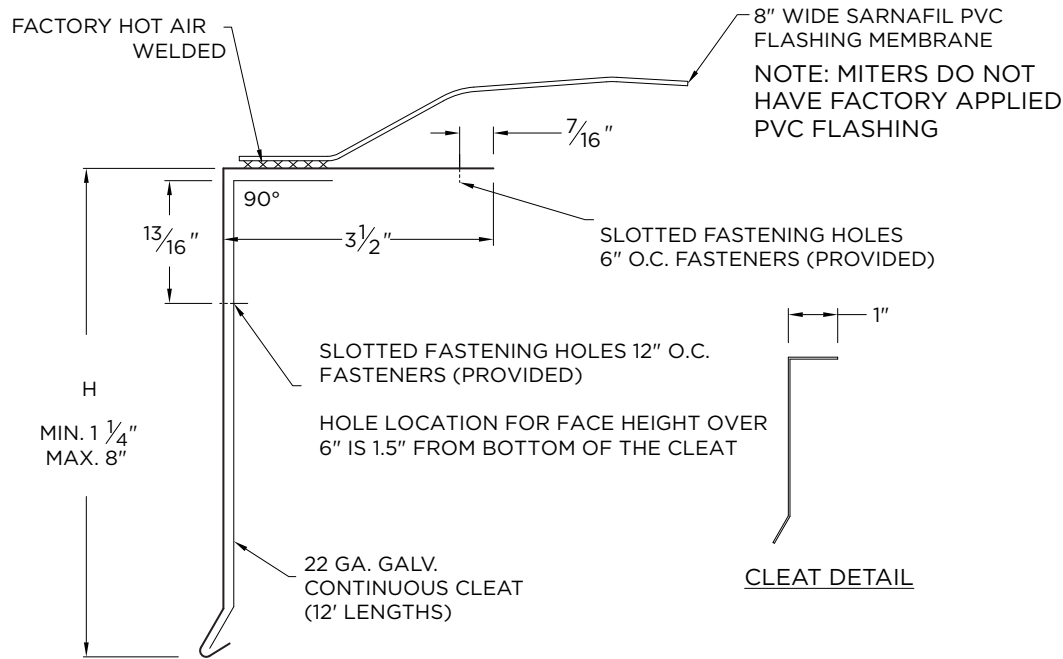

## NOTES

- All cleats provided in 12'-0" lengths
- All covers provided in 8'-0" lengths
- Miters do not have factory-applied PVC Flashing
- No lap notches or splice plates provided
- Slotted hole location on cleat for face heights over 6" is 1.5" from bottom of the cleat
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 282 psf

## APPROVALS



**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**Metal-Era LLC**  
1600 Airport Rd.  
Waukesha, WI 53188  
Phone: 800-558-2162  
www.metalera.com

SHT# 1 of 1

DATE: 10/18/22

DRN BY: JJC

CKD BY: MM

DWG #: 11010-31566

REV: D

## DIMENSIONS

Choose Face Height Size (H Dimension)

- 3"  
 4"  
 6"  
 OTHER (MIN: 1.25" MAX: 8"): \_\_\_\_\_

## MATERIAL

24 ga. Galv Steel PVC Coated (Sika Sarnaclad) with Factory-Applied Flashing Membrane

### Color:

### Flashing Membrane:

- G 410  
 S 327

### Substrate:

- Wood  
 Masonry  
 Metal
- If substrate is not given, wood fasteners will be provided.

## QUANTITIES

\_\_\_\_\_ Lineal Feet (8'-0" Lengths)

\_\_\_\_\_ Outside Miter (90°)

\_\_\_\_\_ Inside Miter (90°)