PERMA-TITE CONTINUOUS CLEAT COPING

TAPERED VERSION

ANSI/SPRI ES-1 TESTED

FM APPROVED

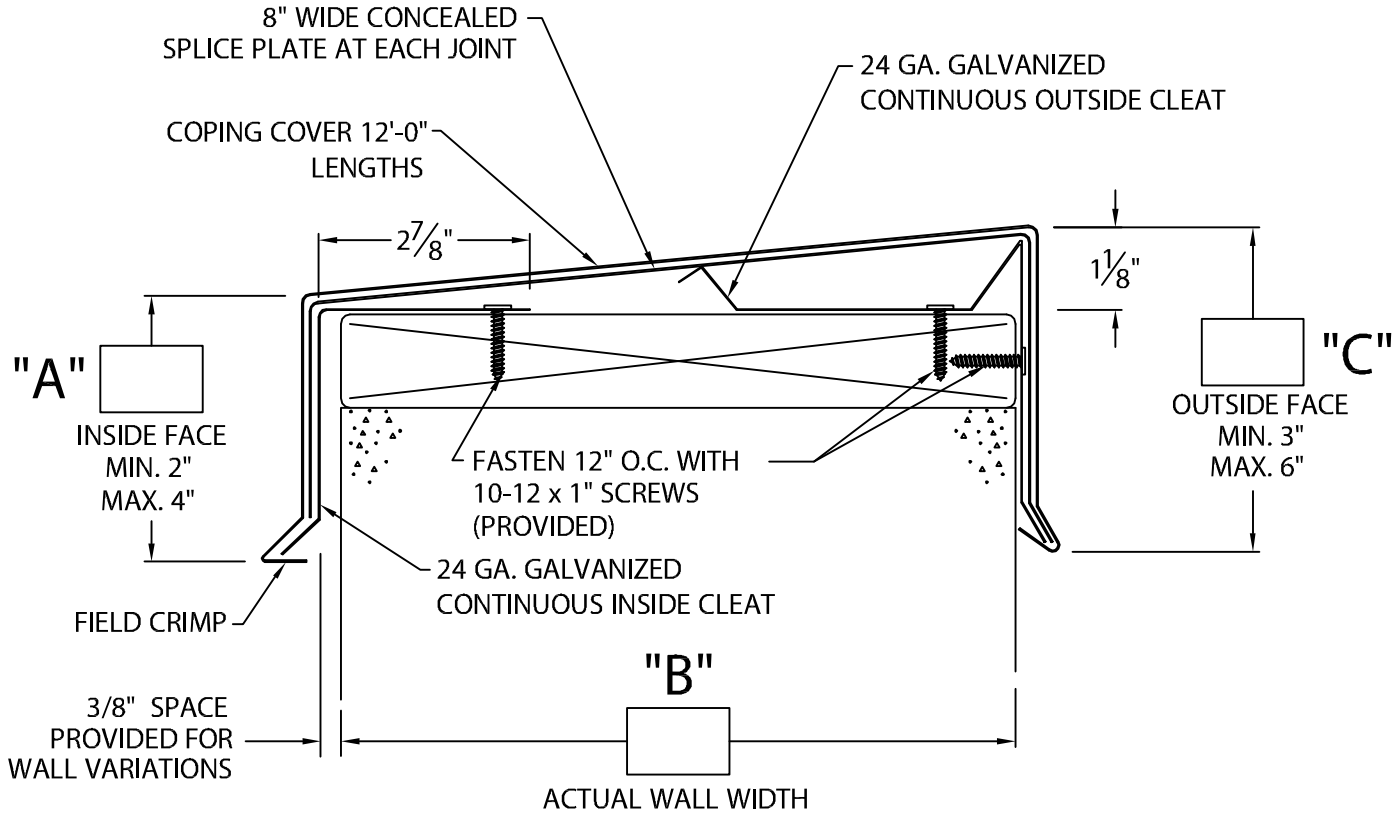

Coping is to be installed per Specifications and Metal-Era's Installation Instruction Dwg. # 11111-14786.

-- Concealed splice plates are provided with factory applied non-curing sealant strips.

-- Actual coping width (in to in) is actual wall width plus 5/8".

-- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.

-- Wood nailer required for FM approval or ANSI/SPRI ES-1 rating.

-- Welded Miters and Accessories
Check one ☐ Required (surcharge) ☐ Not applicable

MATERIAL:

- ☐ 24 Ga. Galv.
- ☐ 22 Ga. Galv. Color:_____
- ☐ .050" Alum.
- ☐ .063" Alum. Finish:_____
- ☐ OTHER _____

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Metal-Era's printed instructions.

Approved by: _____

Date: _____

QUANTITIES:

_____ Lineal Feet (12'-0" Lengths)

_____ Outside Miters @ (_____°)

_____ Inside Miters @ (_____°)

_____ Right End Caps

_____ Left End Caps

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Corporate Offices, Manufacturing
1600 Airport Road; Waukesha, WI 53188
Phone: 800-558-2162
Fax: 800-373-9156
www.metalera.com

METAL-ERA® Roof Edge Solutions

DATE: 03/10/17
DRN BY: JAB
CKD BY: SAK

SHT.#___ OF ___

DWG# 11011-14784 C