FM APPROVED

# PRESTO-TITE FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE UP TO 275 psf

MIAMI-DADE COUNTY APPROVED
NOA No. 13-0419.03 12/11/18
Miami-Dade County, Florida

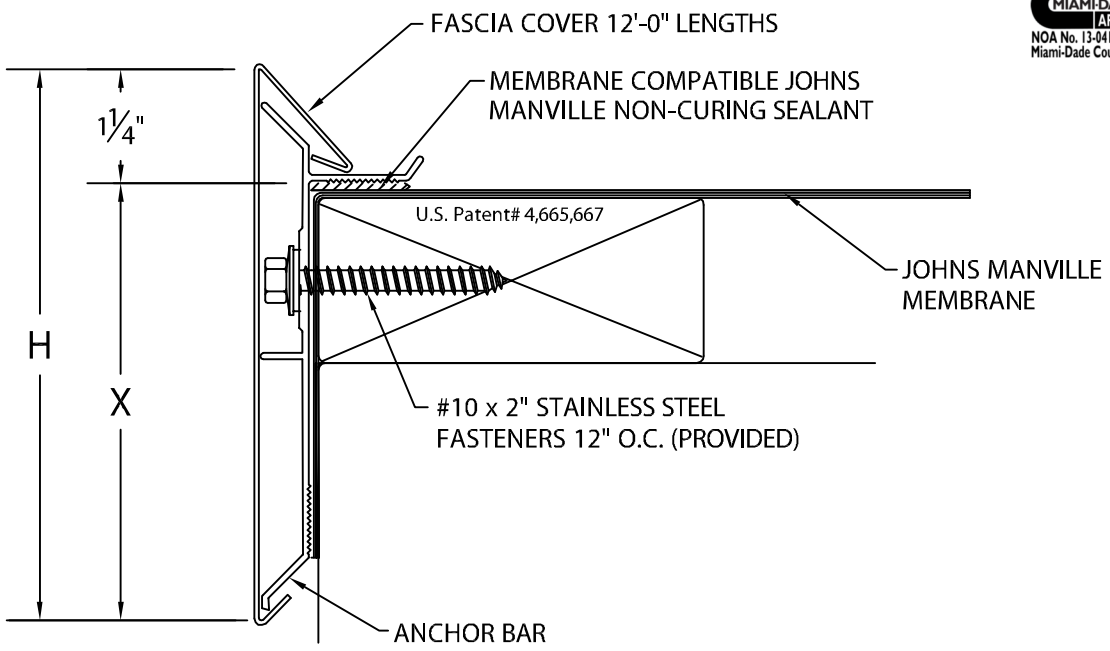


Fascia is to be installed per Specifications and Johns Manville's Installation Instructions Dwg. # 16110-2115

## PRESTO-TITE FASCIA DIMENSIONS

| PRODUCT ID. NO. | H DIM | X DIM | NAILER COVERAGE |
|---|---|---|---|
| ☐ PF-40 | 4" | 2 3/4" | 1 NAILER |
| ☐ PF-55 | 5 1/2" | 4 1/4" | 2 NAILERS |
| ☐ PF-70 | 7" | 5 3/4" | 3 NAILERS |
| ☐ PF-85 | 8 1/2" | 7 1/4" | 4 NAILERS |

## MATERIAL:

☐ 24 Ga. Galv. Steel
☐ .040" Aluminum
☐ OTHER _____

Color:_____ Finish:_____

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Johns Manville's printed instructions.

Approved by: _____

Date: _____

## QUANTITIES:

_____ Lineal Feet (12'-0" Lengths)
_____ Outside Miter(s) @ 90°
_____ Inside Miter(s) @ 90°
_____ Overflow Scupper Style☐A☐B
_____ Spillout Scupper Style☐A☐B
_____ Downspout Scupper Style☐A☐B
(____X____) Size

A: Tapered 1 1/2" Drop
B: Flat

FOR NON-90 MITERS SEE PRINT APPROVAL #16010-2320

PROJECT:
ARCHITECT:
ROOFING CONTRACTOR:
REPRESENTATIVE/DISTRIBUTOR:


51 Lexington Street; Lewiston, ME 04240
CUSTOMER SERVICE: 800-223-8317 USA
800-445-1500 Canada
TECHNICAL SERVICE: 800-445-1500 USA & Canada
FAX: 207-784-0125
OTHER AREAS CALL: 207-784-0123


JM Johns Manville

DATE: 03/20/17
DRN BY: JJC
CKD BY: SAK

SHT.#___ OF ___
DWG# 16010-2116 F