


FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF 275 psf

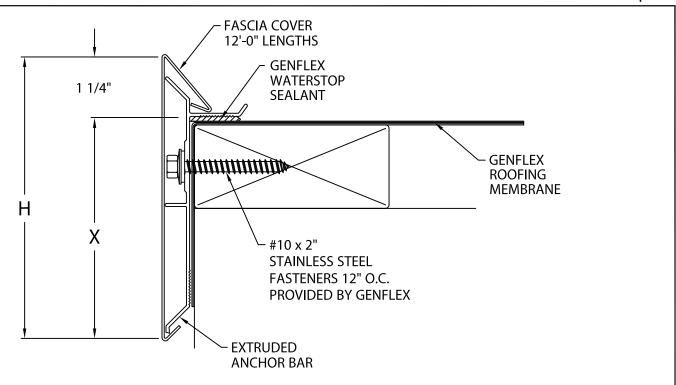

Fascia is to be installed per Specifications and GenFlex's Installation Instructions Dwg. # 22110-2373

| DIMENSIONS | | | | | |
|------------|--------|--------|-----------|-----|--|
| PRODUCT | Н | X | NAILER | | |
| ID. NO. | DIM | DIM | COVERAGE | | |
| ☐ GB-40 | 4" | 2 3/4" | 1 NAILER | | |
| ☐ GB-55 | 5 1/2" | 4 1/4" | 2 NAILERS | | |
| ☐ GB-70 | 7" | 5 3/4" | 3 NAILERS | | |
| ☐ GB-85 | 8 1/2" | 7 1/4" | 4 NAILERS | Col | |
| | | | | | |

1ATERIAL:

24 Ga. Galv. Steel ____ OTHER ____ __.040" Aluminum

Finish:

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

CENIELEY EVCUV

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with GenFlex's printed instructions.

| Approved by: _ | | |
|----------------|--|--|
| | | |
| Date: | | |

QUANTITIES:

_ Lineal Feet (12'-0" Lengths)

_____ Outside Miter(s) @ 90°

_____ Inside Miter(s) @ 90°

_____ Overflow Scupper Style____A___B

_____ Spillout Scupper Style A B

Downspout Scupper Style___A__B

__X___) Size

A: Tapered 1 1/2" Drop B: Flat

FOR NON-90 MITERS SEE PRINT APPROVAL #22010-2369

PROJECT: ARCHITECT: **ROOFING CONTRACTOR:**

Phone: 800-558-2162

Fax: 800-373-9156

www.metalera.com/genflex

Customer Service



REPRESENTATIVE/DISTRIBUTOR:

| DATE: 02/17/21 | SHT.# OF | |
|----------------|-----------------|---|
| DRN BY: JJC | | _ |
| CKD BY: MM | DWG# 22010-2365 | |