




GENFLEX GRAVEL STOP WITH CONTINUOUS CLEAT


NOTES

- Includes concealed splice plates that must be field caulked to prevent water entry
- Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
- Welded miters and accessories require a minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 258 psf

FACE HEIGHT 6" OR LESS

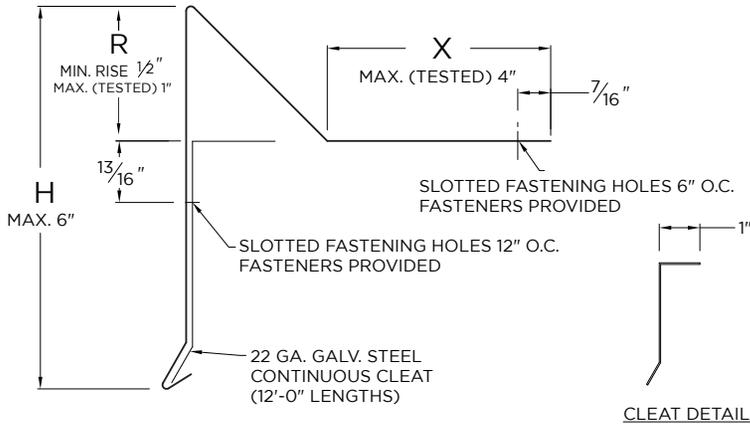

FACE HEIGHT OVER 6"

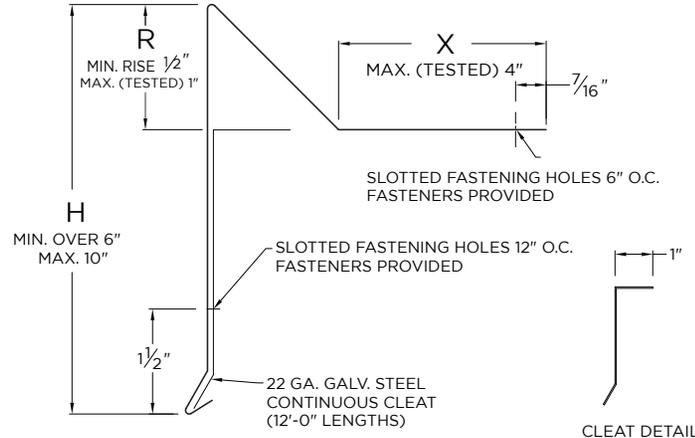

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

GenFlex Roofing Systems

Customer Service
Phone: 800-558-2162
Fax: 800-373-9156
www.metalera.com/genflex

SHT# 1 of 1

DATE: \$%\$-#&()

DRN BY: JJC

CKD BY: MM

DWG #: 22010-5444

REV: <

DIMENSIONS

_____ (H) Face Height

_____ (X) Flange Size

_____ (R) Rise

MATERIAL

24 Ga. Galv. Steel

22 Ga. Galv. Steel

.040" Aluminum

.050" Aluminum

.063" Aluminum

OTHER: _____

Color: _____

Finish: _____

Substrate: Wood

If substrate is not given, wood fasteners will be provided. Masonry

Metal

QUANTITIES

_____ Lineal Feet (12'-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)

Accessory Type:

Quicklock (Default)

Welded (Surcharge)