
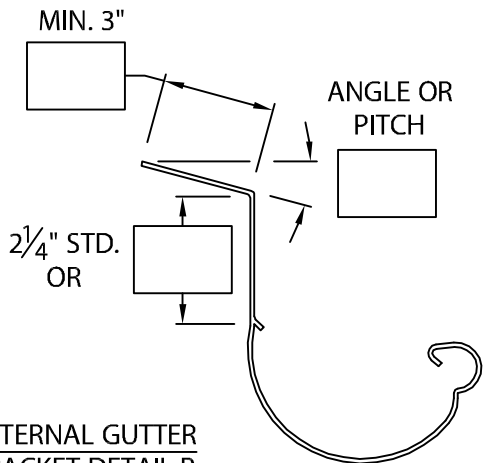




SEAL-TITE LT HALF ROUND GUTTER

ROOF MOUNT VERSION

EXTERNAL GUTTER BRACKET DETAIL A

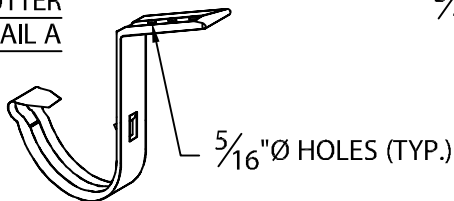

EXTERNAL GUTTER BRACKET DETAIL B

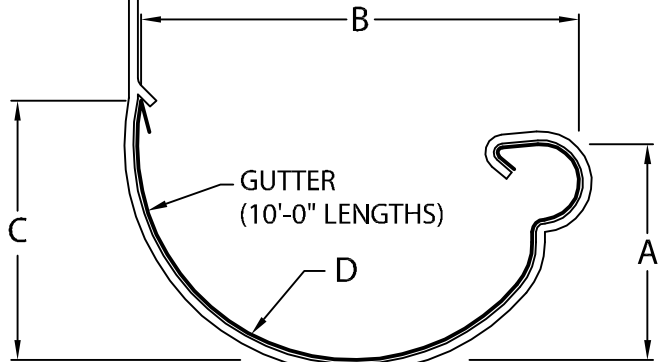

3/16" x 1" STAINLESS BRACKET WRAPPED IN METAL TO MATCH GUTTER
5" Ø & 6" Ø - 36" O.C.
7" Ø, 8" Ø, 9" Ø & 10" Ø - 24" O.C.

GUTTER DIAMETER	A	B	C	D
<input type="checkbox"/> 5" Ø ②	2 1/2"	5 1/4"	3"	2 1/2" RADIUS
<input type="checkbox"/> 6" Ø	3"	6 1/4"	3 1/2"	3" RADIUS
<input type="checkbox"/> 7" Ø	3 1/2"	7 1/4"	4"	3 1/2" RADIUS
<input type="checkbox"/> 8" Ø	4"	8 1/4"	4 1/2"	4" RADIUS
<input type="checkbox"/> 9" Ø	4 1/2"	9 1/4"	5"	4 1/2" RADIUS
<input type="checkbox"/> 10" Ø	5"	10 1/4"	5 1/2"	5" RADIUS

① 10 - 12 x 1" SCREWS (PROVIDED)

② THIS SIZE NOT AVAILABLE IN 22 GA. GALV. STEEL OR .050" ALUM.

MATERIAL:

- ___ 24 GA. GALV. STEEL ③
- ___ 22 GA. GALV. STEEL ② ③
- ___ .032" ALUMINUM ③
- ___ .040" ALUMINUM ③
- ___ .050" ALUMINUM ② ④

COLOR: _____

OTHER _____ FINISH: _____

QUANTITIES:

- _____ LINEAL FEET 10'-0" LENGTHS
- _____ OUTSIDE MITERS @ 90°
- _____ INSIDE MITERS @ 90°
- _____ ENDCAPS: RIGHT _____ LEFT _____

FOR NON-90 MITERS SEE PRINT APPROVAL #11012-25392

NOTES:

- MATERIAL PROVIDED WITH 6" WIDE SPLICE PLATES. ④
- MATERIAL NEEDS FIELD NOTCHED LAP JOINTS. ③
- 1/8" STAINLESS STEEL POP RIVETS PROVIDED.
- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS ARE FURNISHED STANDARD UTILIZING POP RIVETS, THEN FACTORY SEALED WATERTIGHT.
- WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE/DISTRIBUTOR: _____

Corporate Offices, Manufacturing
1600 Airport Road; Waukesha, WI 53188
Phone: 800-558-2162
Fax: 800-373-9156
www.metalera.com



DATE: 01/11/17

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 11012-25435

A