
PMR TERMINATION BAR

LIGHTWEIGHT PROTECTED MEMBRANE ROOFING VERSION

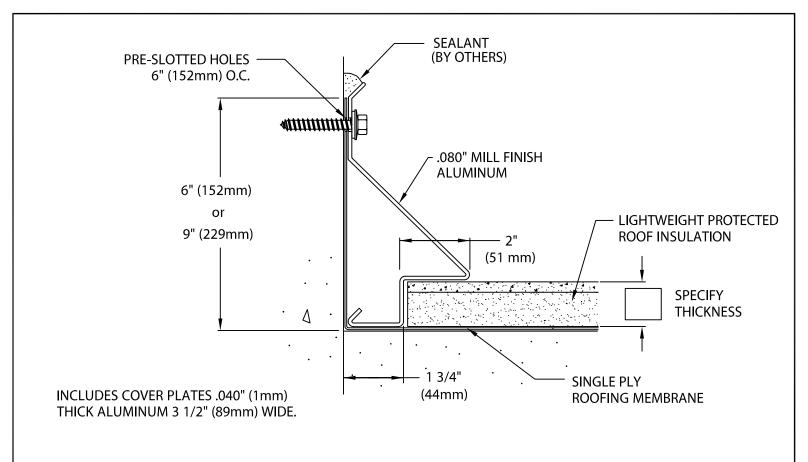

Termination Bar is to be installed per Specifications and Metal-Era's Installation Instructions Dwg. # 11116-1703

NOTE: Fasteners by others. Use appropriate fasteners as recommended by membrane manufacturer to maintain constant compression seal.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Metal-Era's printed instructions.

Approved by:		
Date:		

DIMENSIONS:

____ PL-660 - 6" (152 mm)

____ PL-690 - 9" (229 mm)

QUANTITIES:

_____ Lineal Feet (12'-0" (3.65 M) Lengths)

____ Welded Outside Miters (_____°)

www.metalera.com

__ Welded Inside Miters (_____°)

PROJECT:	Corporate Offices, Manufacturing
ARCHITECT:	1600 Airport Road; Waukesha, WI 53188
	Phone: 800-558-2162
ROOFING CONTRACTOR:	Fax: 800-373-9156



REPRESENTATIVE/DISTRIBUTOR:

DATE: 06/01/08 | SHT.#___ OF ____

DRN BY: JJC | DWG# 11016-1611 | C