
# FM APPROVED

## VERSITRIM TPO DRIP EDGE

WITH CONTINUOUS CLEAT

ANSI / SPRI ES-1 TESTED - FLORIDA BUILDING CODE APPROVED

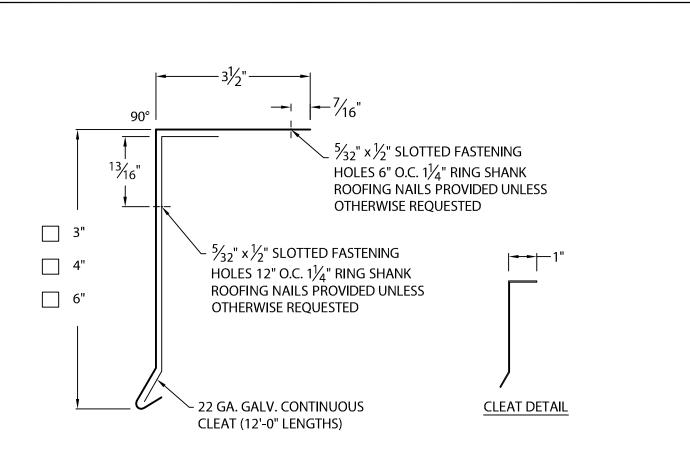

N	O	Т	F	ς	•
I		•	ᆫ	J	•

- -- ALL FASTENERS SUPPLIED BY VERSICO.
- -- NO LAP NOTCHES PROVIDED.
- -- NO SPLICE PLATES PROVIDED.

Fabrication will proceed only after receipt of signed print approval.

#### Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Versico, Inc's. printed instructions.

Approved by:	
Date:	

#### **MATERIAL:**

24 Ga. (.65 mm) Galv. Steel Versico TPO Coated

#### **COLOR:**

White

### **QUANTITIES:**

\_\_\_\_\_ Lineal Feet (12'-0" (3.65 m) Lengths)

\_\_\_\_\_ Outside Miters @ 90°

Inside Miters @ 90°

FOR NON-90° MITERS SEE PRINT APPROVAL #18010-2039

#### PROJECT:

**ARCHITECT:** 

**ROOFING CONTRACTOR:** 

REPRESENTATIVE/DISTRIBUTOR:

DATE: 10/09/17

SHT.#\_\_\_ OF \_

Customer Service

800-558-2162

(Metal-Era)

DRN BY: JJC
CKD BY: SAK

DWG#18010-20874

