



DERBIGUM PERMA-TITE SYSTEM 300 RADIUS FASCIA

SNAP-ON VERSION

IMPORTANT! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:

1.) THE ACTUAL KNOWN RADIUS IS


_____ ' FEET _____ " INCHES

MINIMUM OF 13'-0"
(CALL IF LESS)

OR


2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

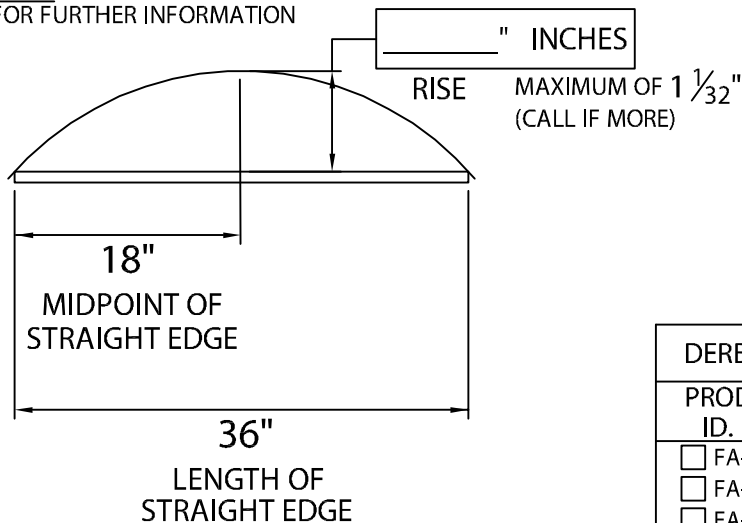

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

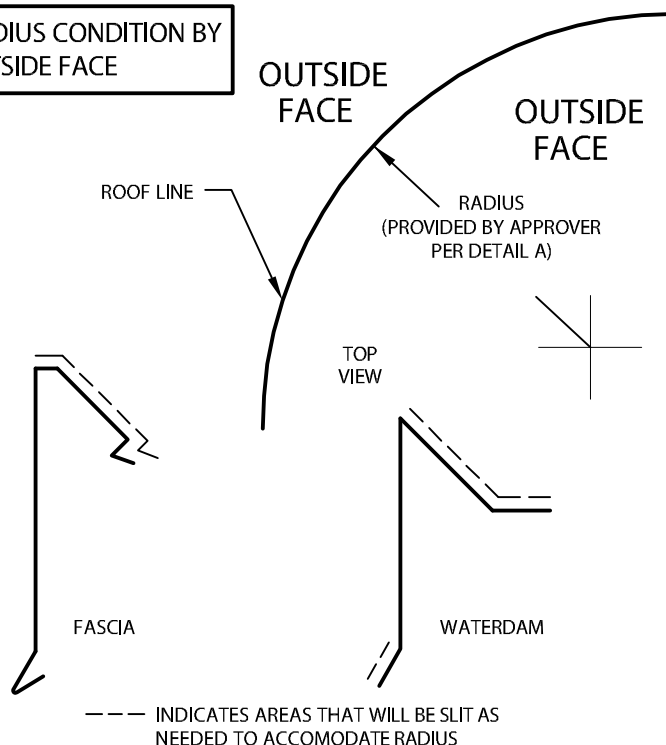

DERBIGUM PERMA-TITE SYSTEM 300 RADIUS FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> FA-355	5 1/4"	2 7/8"	1 NAILER
<input type="checkbox"/> FA-365	6 3/4"	4 3/8"	2 NAILERS
<input type="checkbox"/> FA-380	8 1/4"	5 7/8"	3 NAILERS
<input type="checkbox"/> FA-395	9 3/4"	7 3/8"	4 NAILERS
<input type="checkbox"/> FA-3110	11 1/4"	8 7/8"	5 NAILERS
<input type="checkbox"/> FA-3125	12 3/4"	10 3/8"	6 NAILERS

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Derbigum's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

_____ 24 GA. GALV. STEEL*
OIL CANING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND _____ .040" ALUMINUM
_____ .050" ALUMINUM
_____ .063" ALUMINUM
_____ OTHER: _____

COLOR: _____

FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service
1-800-727-9872



DERBIGUM®
MAKING BUILDINGS SMART

DATE: 02/10/17

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 20010-25657

A