



COPING TRANSITION MITERS

90° MITERS

OUTSIDE MITER

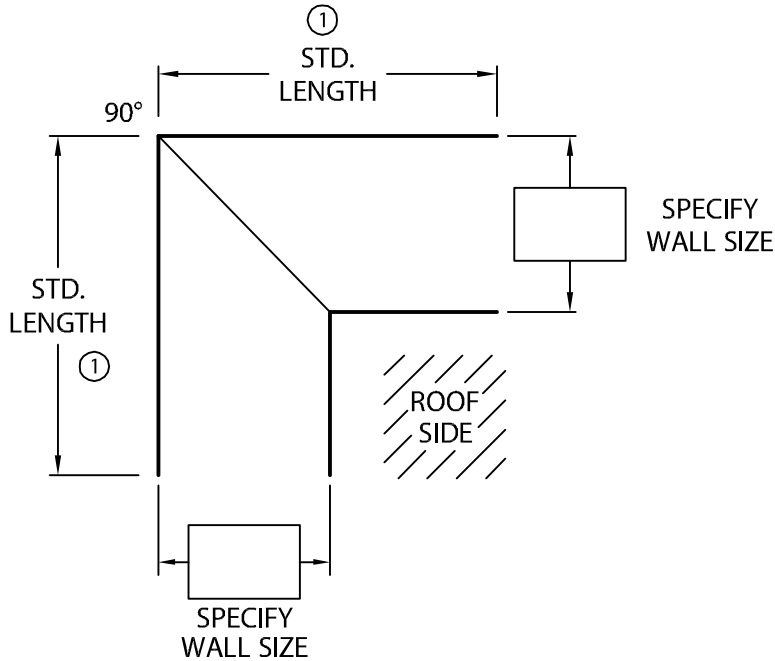


INSIDE MITER

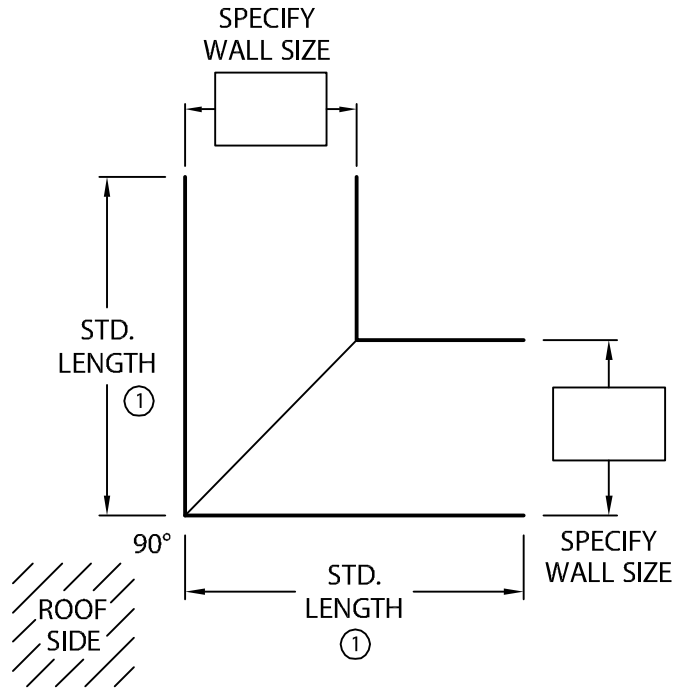

FOR CUSTOM LEG LENGTHS MODIFY DRAWINGS ABOVE

NOTES:

- ① THE STANDARD LEG LENGTH FOR COPING WITH A DRIP IS THE LARGER WALL SIZE + $9\frac{5}{8}$ ".
 THE STANDARD LEG LENGTH FOR COPING WITH A FLUSH FACE IS THE LARGER WALL SIZE + $10\frac{1}{8}$ ".

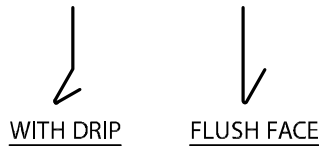

- ② WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

MATERIAL:

- 24 GA. GALVANIZED STEEL
 22 GA. GALVANIZED STEEL
 .040" ALUMINUM
 .050" ALUMINUM
 .063" ALUMINUM
 OTHER _____
- COLOR: _____
 FINISH: _____

QUANTITIES:

- _____ OUTSIDE MITERS @ 90°
 _____ INSIDE MITERS @ 90°
- SPECIFY ACCESSORY TYPE:
 WELDED ②
 QUICKLOCK

FOR NON-90 MITERS SEE PRINT APPROVAL #11011-1487

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

CORPORATE OFFICES, MANUFACTURING
 1600 AIRPORT ROAD; WAUKESHA, WI 53188
 PHONE: 800-558-2162
 FAX: 800-373-9156
 WEBSITE: WWW.METALERA.COM
 EMAIL: QUOTE@METALERA.COM



DATE: 01/03/17

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 11011-1489

F