


# WL-200-1 INTERLOCKING EDGE RETAINER

WESTILE BALLAST PAVER VERSION

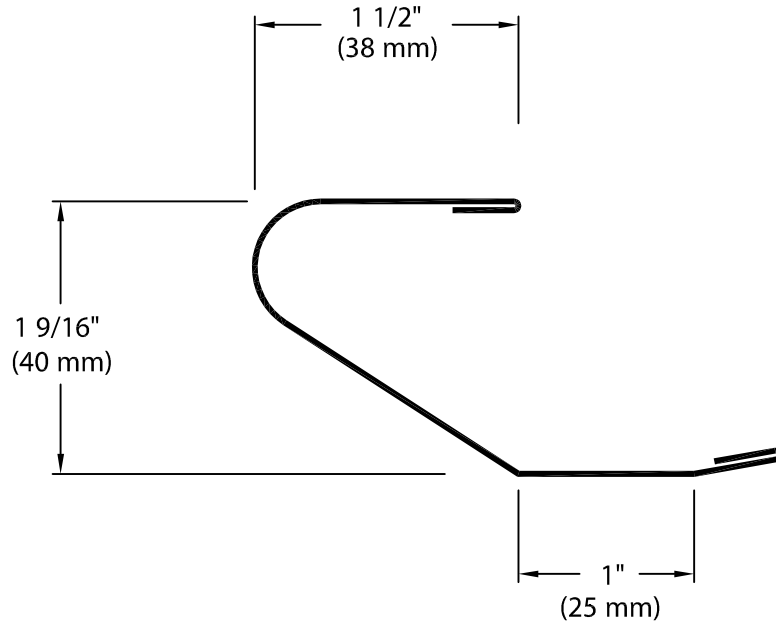

## WL-200-1

Retainer is to be installed per Specifications and Metal-Era's Installation Instructions Dwg. # 11116-1790

- NOTES:**
1. THE EDGE STRIP SHALL BE INSTALLED SO THAT BOTH ENDS START AND/OR STOP IN THE MIDDLE OF A WESTILE UNIT.
  2. 3/8" (9.53mm) GAP BETWEEN BAR SECTIONS

### MATERIAL:

- \_\_\_ 22 Ga. (.81 mm) STAINLESS STEEL  
TYPE 304-2B FINISH
- \_\_\_ .050" (1.27 mm) MILL ALUMINUM  
TYPE 3003-H14 ALLOY

Fabrication will proceed only after receipt of signed print approval.

### Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Metal-Era's printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

### QUANTITIES:

- \_\_\_\_\_ Lineal Feet (12'-0" (3.65 M) Lengths)
- \_\_\_\_\_ Welded Outside Miters (\_\_\_\_\_°)
- \_\_\_\_\_ Welded Inside Miters (\_\_\_\_\_°)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Corporate Offices, Manufacturing  
1600 Airport Road; Waukesha, WI 53188  
Phone: 800-558-2162  
Fax: 800-373-9156  
www.metalera.com



DATE: 10/12/05

DRN BY: DWP

CKD BY: SAK

SHT.# \_\_\_\_ OF \_\_\_\_

DWG# 11016-1789

A