


"Z" COPING MITERS

**OUTSIDE
FACE**

OUTSIDE FACE HEIGHT

SPECIFY
DIMENSION

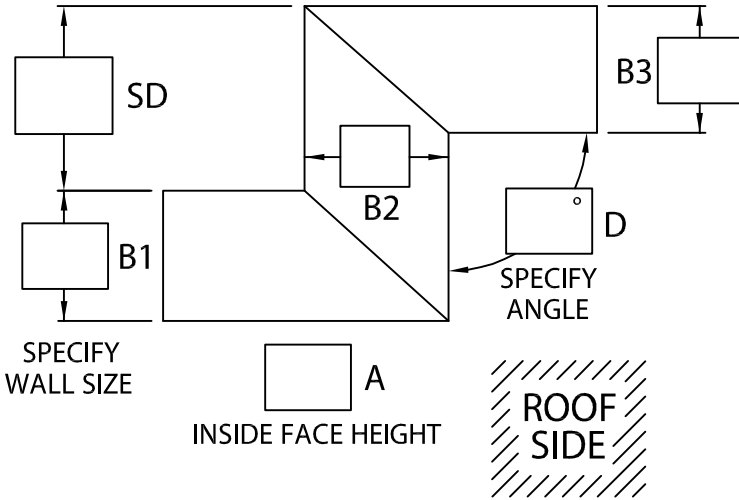

R.H. QUANTITY. _____


STANDARD LEG LENGTHS

CUSTOM LEG LENGTHS _____

**OUTSIDE
FACE**

OUTSIDE FACE HEIGHT

SPECIFY
WALL SIZE

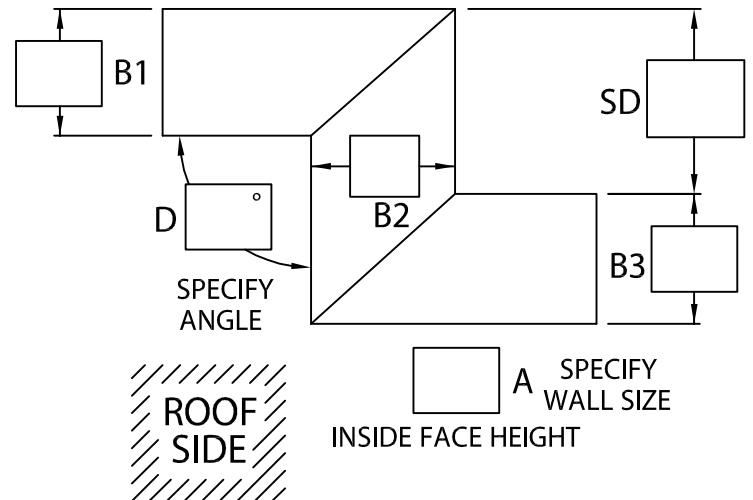

L.H. QUANTITY. _____

STANDARD LEG LENGTHS

CUSTOM LEG LENGTHS _____

NOTES: -- Concealed splice plates are provided with factory applied dual non-curing sealant strips.
-- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.

-- Welded Miters and Accessories
Check one Required (surcharge) Not applicable

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Dow Roofing Systems' printed instructions.

Approved by: _____

Date: _____

MATERIAL:

___ 24 Ga. (.65 mm) Steel

___ .040" (1.01 mm) Alum.

___ .050" (1.27 mm) Alum.

___ .063" (1.60 mm) Alum.

___ Other _____

Color: _____

Finish: _____

QUANTITIES:

_____ Right Hand Miters @ (_____)°

_____ Left Hand Miters @ (_____)°

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Corporate Offices
Dow Roofing Systems
Nine Sullivan Road
Holyoke, MA 01040
P: 800-621-ROOF



ROOFING SYSTEMS

DATE: 02/03/09

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 12011-2997

C