


ONE COPING

FLAT VERSION

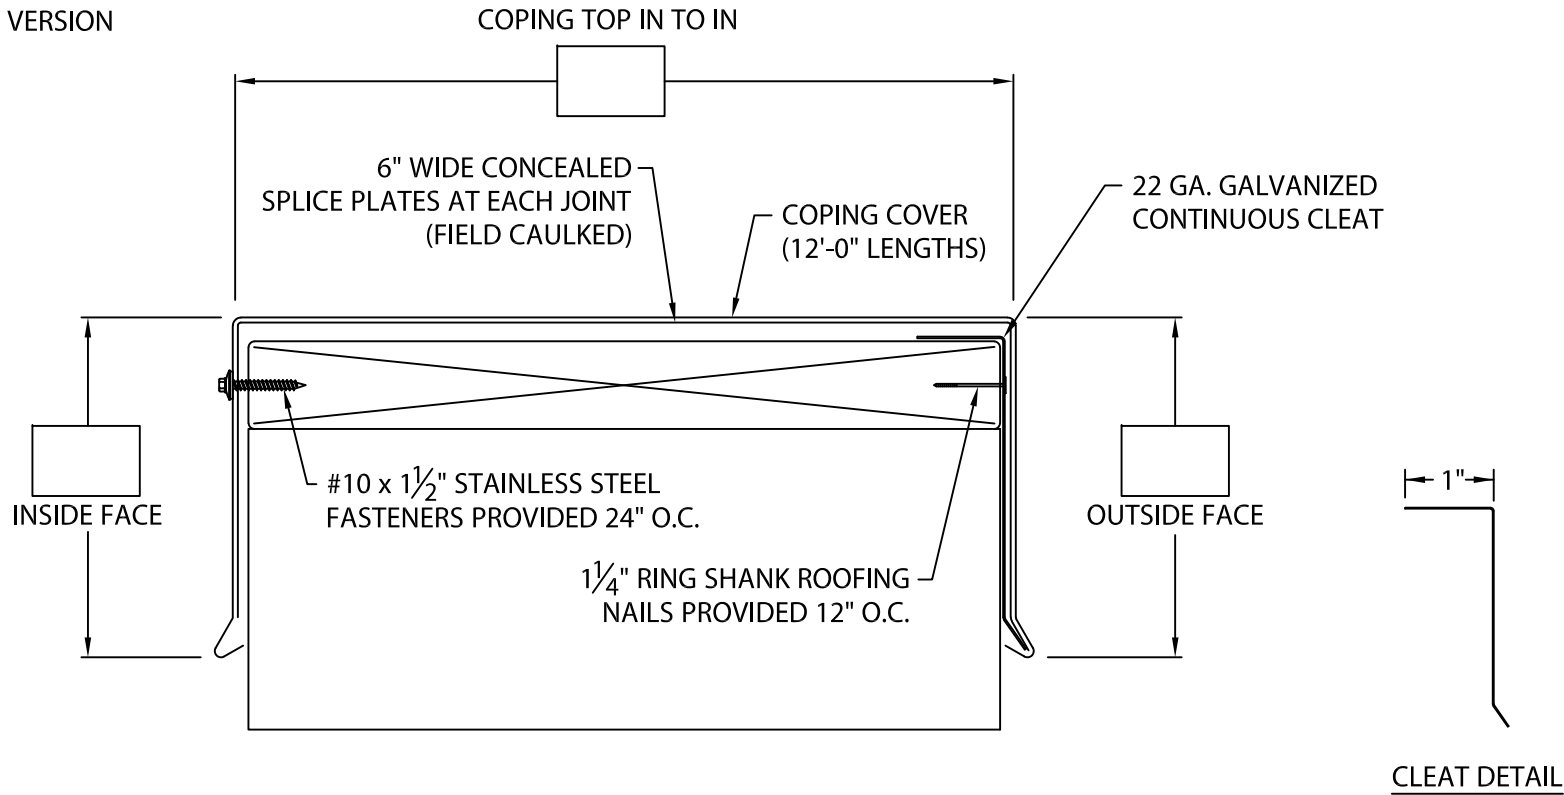

ANSI/SPRI ES-1
DESIGN PRESSURE
OF 160 psf

MATERIAL:

___ 24 GA. GALVANIZED STEEL

___ 22 GA. GALVANIZED STEEL

___ .040" ALUMINUM

SPECIFY
ACCESSORY TYPE:

___ .050" ALUMINUM

WELDED

___ .063" ALUMINUM

QUICKLOCK

___ OTHER _____

COLOR _____

FINISH _____

ACCESSORIES:

(MITERS, ENDCAPS, ETC.)

UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE PROVIDED WITH A QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT)

WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

NOTES:

1. ALL FASTENERS PROVIDED (NO HOLES PROVIDED).
2. 6" WIDE SPLICE PLATES PROVIDED AT EACH JOINT. CONCEALED SPLICE PLATES MUST BE FIELD CAULKED TO PREVENT WATER ENTY.

QUANTITIES:

_____ LINEAL FT. (12'-0" LENGTHS)

_____ OUTSIDE MITER(S) 90°

_____ INSIDE MITER(S) 90°

_____ RIGHT ENDCAP(S)

_____ LEFT ENDCAP(S)

FOR NON-90 MITERS SEE PRINT APPROVAL #11011-1487

PRINT APPROVED BY:

DATE:

SIGNATURE:

A SIGNED PRINT APPROVAL SIGNIFIES A CONTRACTOR HAS VERIFIED ALL DIMENSIONS, SIZES, QUANTITIES AND MATERIAL TYPES.

FABRICATION CAN ONLY PROCEED UPON RECIEPT OF SIGNED PRINT APPROVAL.

CUSTOMER SERVICE:
800-558-2162

FAX:
800-373-9156

WEB SITE:
METALERA.COM

DATE: 09/17/18

DWN BY: JJC

SHEET: ___ OF ___

DWG: 24311-2722 | K