




SOPREMA GRAVEL STOP WITH CONTINUOUS CLEAT


NOTES

- Includes concealed splice plates that must be field caulked to prevent water entry
- Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
- Welded miters and accessories require a minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 258 psf

FACE HEIGHT 6" OR LESS

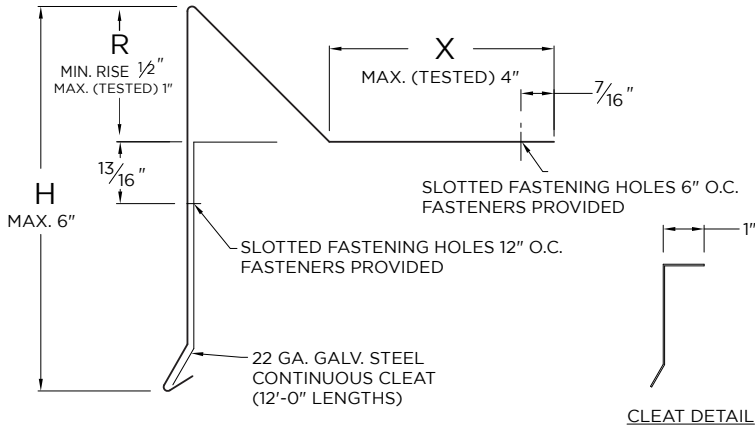

FACE HEIGHT OVER 6"

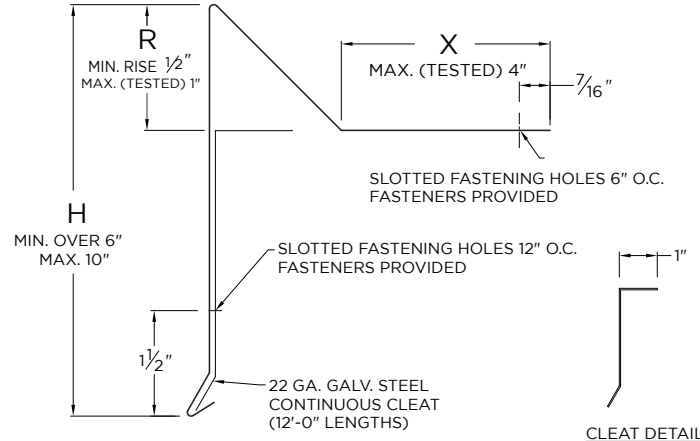

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

SOPREMA
800-356-3521
www.soprema.us
310 Quadral Dr.
Wadsworth, OH 44281
f: 330-334-6257

SHT# 1 of 1

DATE: \$\$\$-##(

DRN BY: JJC

CKD BY: MM

DWG #: 33010-22945

REV: 8

DIMENSIONS

_____ (H) Face Height
_____ (X) Flange Size
_____ (R) Rise

MATERIAL

- 24 Ga. Galv. Steel Color: _____
 22 Ga. Galv. Steel Finish: _____
 .040" Aluminum
 .050" Aluminum **Substrate:** Wood
 .063" Aluminum If substrate is not given, wood fasteners will be provided. Masonry
 OTHER: _____ Metal

QUANTITIES

_____ Lineal Feet (12'-0" Lengths)
 _____ Outside Miter (90°)
 _____ Inside Miter (90°)

Accessory Type:
 Quicklock (Default)
 Welded (Surcharge)