


# GENFLEX DRIP EDGE

WITHOUT CONTINUOUS CLEAT

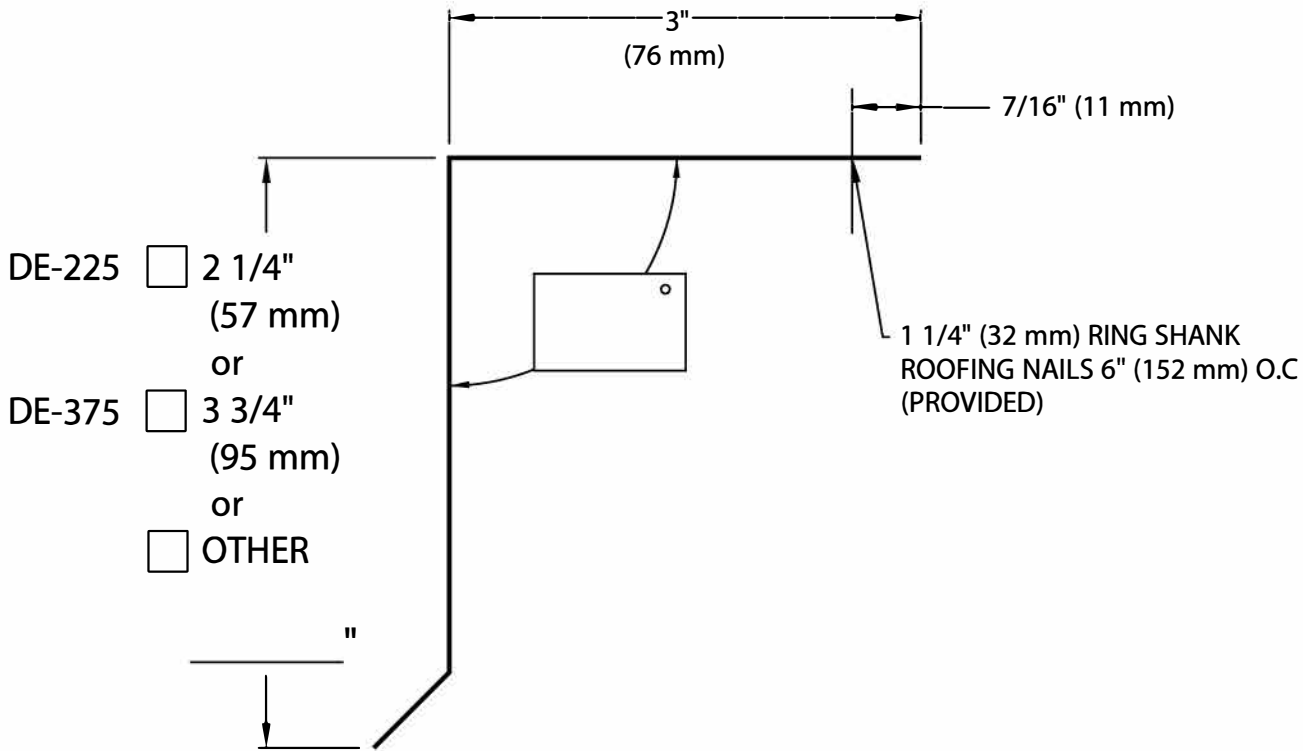

NOTE: LAP SECTIONS 1" (25 mm) MINIMUM.

**NOTES:** --Optional factory applied asphalt primer for use with built-up or modified systems is available upon request.  
--Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with GenFlex's printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

## MATERIAL:

\_\_\_ 24 Ga. (.65 mm) Galv. Steel

\_\_\_ .040" (1.01 mm) Aluminum

\_\_\_ OTHER \_\_\_\_\_

Color: \_\_\_\_\_ Finish: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ Lineal Feet (12'-0" (3.65 m) Lengths)

\_\_\_\_\_ Outside Miters @ ( \_\_\_\_\_°)

\_\_\_\_\_ Inside Miters @ ( \_\_\_\_\_°)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service

Phone: 800-588-2162

Fax: 800-373-9156

[www.metalera.com/genflex](http://www.metalera.com/genflex)

**GENFLEX**

DATE: 06/14/21

DRN BY: JJC

CKD BY: MM

SHT # \_\_\_ of \_\_\_

DWG #: 22010-1768 | **D**