



VERSITRIM 2000 STANDARD RADIUS FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS

_____ ' FEET _____ " INCHES

OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

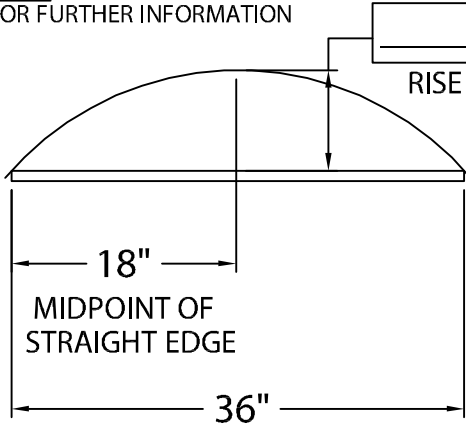

RISE


MINIMUM OF 2'-6"
(CALL IF LESS)
* RADIUS PRODUCT NOT
REQUIRED IF OVER 100'-0"

_____ " INCHES
MAXIMUM OF 6"
(CALL IF MORE)
* RADIUS PRODUCT NOT
REQUIRED IF UNDER $\frac{5}{32}$ "


LENGTH OF
STRAIGHT EDGE

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.


DETAIL A

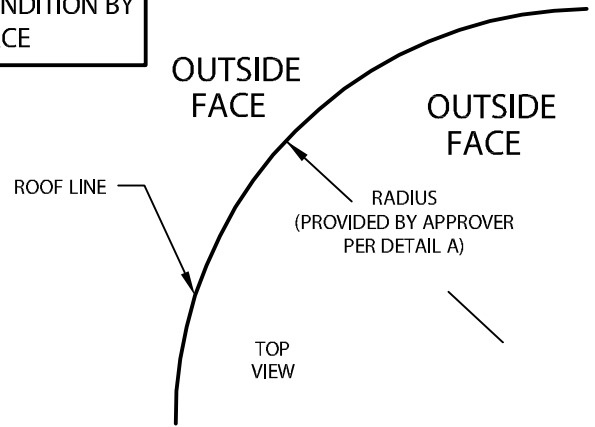

INDICATES AREAS THAT WILL BE SLIT AS
NEEDED TO ACCOMMODATE RADIUS



FASCIA COVER WILL
BE PROVIDED IN 6'-0"
OR 12'-0" LENGTHS,
DEPENDING ON
RADIUS CONDITION



RADIUS EXTRUDED BAR
PROVIDED IN 12'-0" LENGTHS,
EITHER SLIT OR ROLLED,
DEPENDING ON RADIUS
CONDITION

VERSITRIM 2000 STANDARD RADIUS FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM.	X DIM.	COVERAGE
<input type="checkbox"/> V-2040	4"	2 3/4"	1 NAILER
<input type="checkbox"/> V-2055	5 1/2"	4 1/4"	2 NAILERS
<input type="checkbox"/> V-2070	7"	5 3/4"	3 NAILERS
<input type="checkbox"/> V-2085	8 1/2"	7 1/4"	4 NAILERS

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with with Versico, Inc's. printed instructions.

Approved by: _____

Date: _____

MATERIAL:

___ 24 Ga. Galv. Steel

___ .040" Aluminum

___ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet 12'-0" Lengths

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service
800-558-2162
(Metal-Era)



DATE: 03/04/17

DRN BY: JJC

CKD BY: SAK

SHT.# ___ OF ___

DWG# 18010-2031

G