




SOPRA-TITE SENTINEL 200 FASCIA

SINGLE-PLY APPLICATION, SNAP-ON VERSION

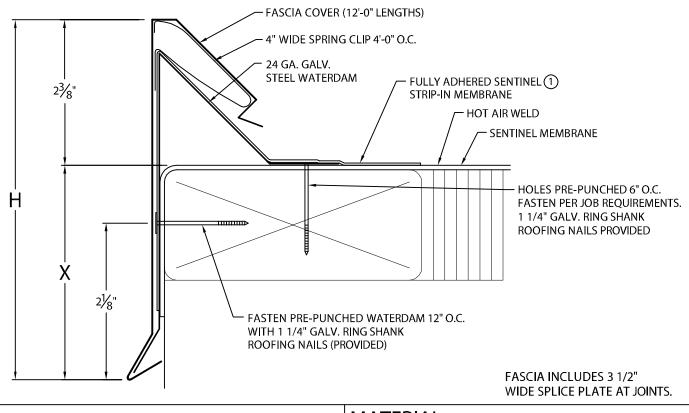

(1) STANDARD FASCIA WILL NOT FUNCTION WITH TPO OR PVC STRIP-IN MEMBRANE THICKER THAN .060".					MATERIAL:		
② OIL CANNING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR					24 GA. GALV. STEEL ②050" ALUMINUM		
FACE HEIGHTS ABOVE 8¼" (3) WELDED ACCESSORIES REQUIRE A MINIMUM OF MATERIAL THICKNESS OF .050"					040" ALUMINUM ②063" ALUMINUM OTHER		
NOTE: UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD.					COLOR: FINISH:		
SOPRA-TITE SENTINEL 200 FASCIA DIMENSIONS					QUANTITIES:		
PRODUCT ID. NO.	H DIM 5 1/4"		X DIM 2 7/8"	NAILER COVERAGE 1 NAILER	LINEAL FEET 12'-0" LENGTHS		NGTHS
FA-30 FA-65 FA-80 FA-95 FA-110	6 3 8 1, 9 3,	/4" /4" /4"	2 7/8 4 3/8" 5 7/8" 7 3/8" 8 7/8"	2 NAILERS 3 NAILERS 4 NAILERS 5 NAILERS	OUTSIDE MITER(S) @ 90° INSIDE MITER(S) @ 90° RIGHT ENDCAP(S)		SPECIFY ACCESSORY TYPE: ☐ WELDED ③
☐ FA-110	11 1/4" 12 3/4"		10 3/8"	6 NAILERS	—		☐ STANDARD
ANSI/SPRI/FM 4435/ ES-1 DESIGN PRESSURE FA-50 TO FA-80 IN 24 GA. OR .040" - 196 psf FA-50 TO FA-80 IN .050 OR .063" - 216 psf FA-95 TO FA-125 IN .050 OR .063" - 116 psf				RIGHT ENDWALL FLASHING(S)LEFT ENDWALL FLASHING(S)OVERFLOW SCUPPER(S) STYLEABSPILLOUT SCUPPER(S) STYLEABDOWNSPOUT SCUPPER(S) STYLEAB(X) SIZE A: TAPERED 1 1/2" DROP			
AUTHORIZED SIGNATURE: APPROVED BY:							
DATE:					B: FLAT FOR NON-90 MITERS SEE PRINT APPROVAL #33010-20199		
PROJECT:							
ARCHITECT:							
ROOFING CON	NTRACTOR						
REPRESENTATIVE/DISTRIBUTOR:							
	800-356-3521			200-356-3521	310 Quadral Dr.	DATE: 01/09/17	SHT.# OF
www.soprema.us				Wadsworth, OH 44281 f: 330-334-6257	DRN BY: JJC CKD BY: SAK	DWG#33010-21816 E	