



# NON 90° COPING MITERS

## OUTSIDE MITER - OBTUSE

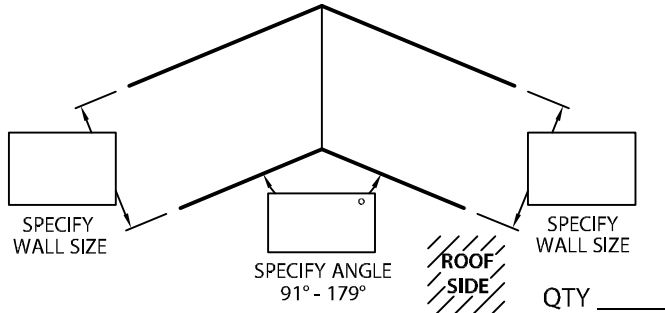


## OUTSIDE MITER - ACUTE

INTERNAL USE

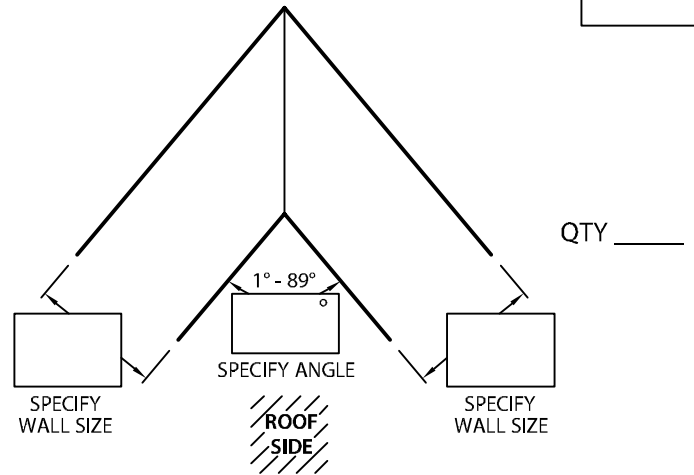


## INSIDE MITER - OBTUSE

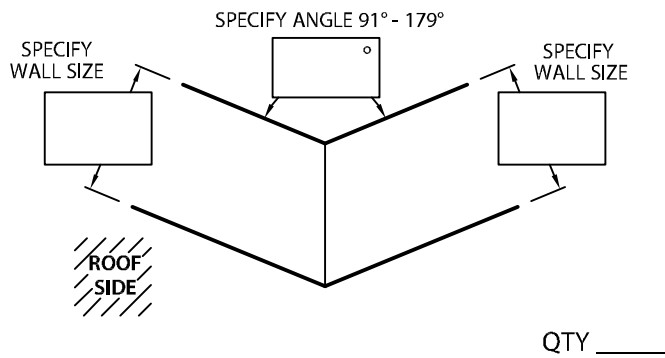

## INSIDE MITER - ACUTE

INTERNAL USE

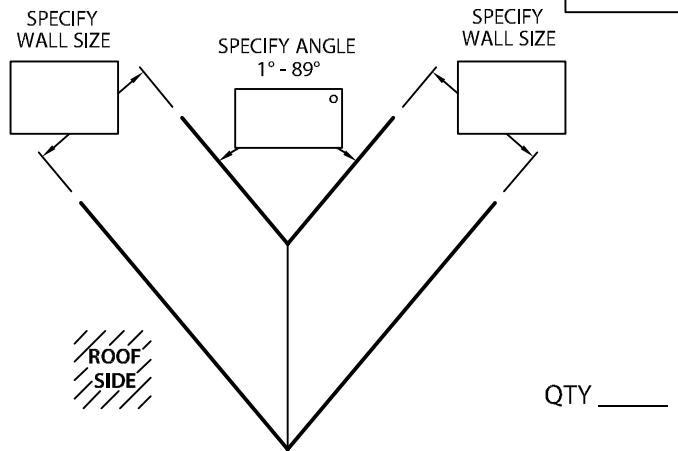

### NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

### MATERIAL:

- \_\_\_ 24 GA. GALVANIZED STEEL
- \_\_\_ 22 GA. GALVANIZED STEEL
- \_\_\_ .040" ALUMINUM
- \_\_\_ .050" ALUMINUM
- \_\_\_ .063" ALUMINUM
- \_\_\_ OTHER \_\_\_\_\_

SPECIFY ACCESSORY TYPE:

- WELDED ①
- QUICKLOCK

AUTHORIZED SIGNATURE:

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

COLOR: \_\_\_\_\_

FINISH: \_\_\_\_\_

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service  
1-800-727-9872



DATE: 02/11/17

DRN BY: JJC

CKD BY: SAK

SHT.# \_\_\_\_\_ OF \_\_\_\_\_

DWG# 20011-25667

**A**

# NON 90° COPING MITERS

RIGHT ANGLES ARE 90°  
ACUTE ANGLES RANGE FROM 1° - 89°  
OBTUSE ANGLES RANGE FROM 91° - 179°

