



NON 90° COPING MITERS

OUTSIDE MITER - OBTUSE

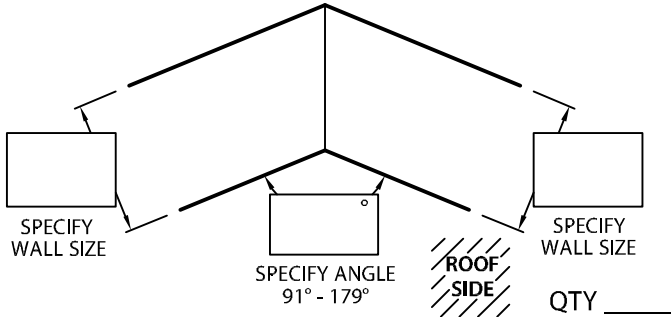


OUTSIDE MITER - ACUTE

INTERNAL USE

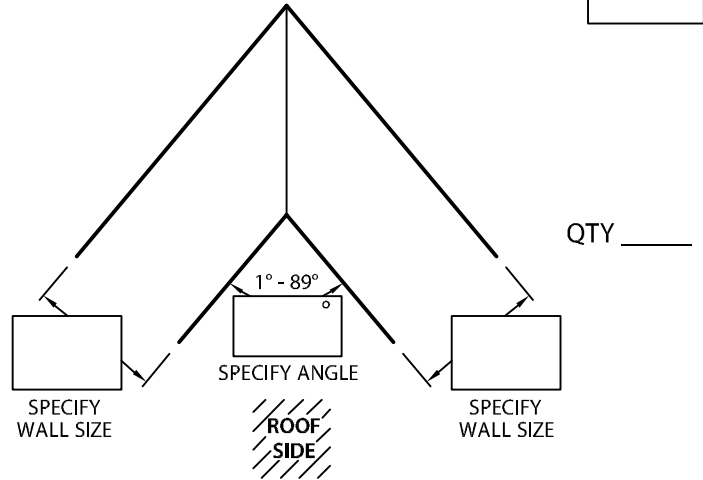


INSIDE MITER - OBTUSE

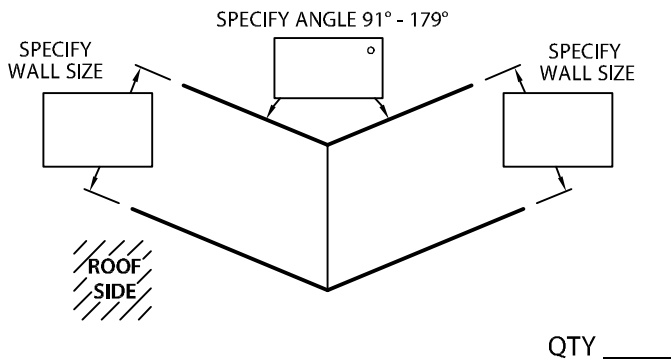

INSIDE MITER - ACUTE

INTERNAL USE

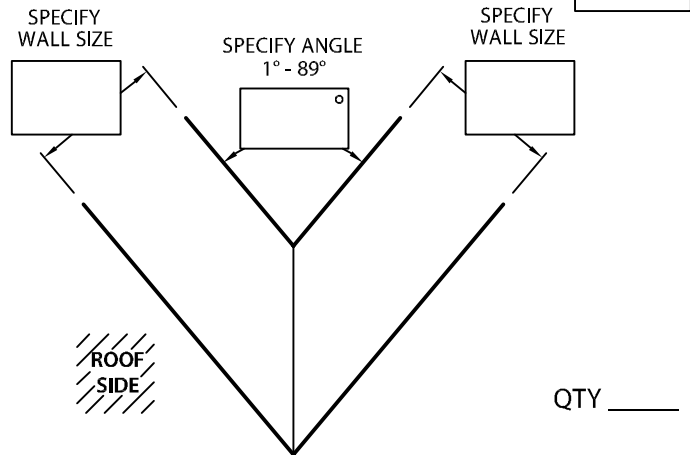

NOTES:

— FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

- ___ 24 GA. GALVANIZED STEEL
- ___ 22 GA. GALVANIZED STEEL
- ___ .040" ALUMINUM
- ___ .050" ALUMINUM
- ___ .063" ALUMINUM
- ___ OTHER _____

SPECIFY ACCESSORY TYPE:

- WELDED ①
- QUICKLOCK

AUTHORIZED SIGNATURE: _____

APPROVED BY: _____

DATE: _____

COLOR: _____

FINISH: _____

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE/DISTRIBUTOR: _____

51 LEXINGTON STREET; LEWISTON, ME 04240
 CUSTOMER SERVICE: 800-223-8317 USA
 800-445-1500 CANADA
 TECHNICAL SERVICE: 800-445-1500 USA & CANADA
 FAX: 207-784-0125
 OTHER AREAS CALL: 207-784-0123



DATE: 10/14/16

SHT.# 1 OF 2

DRN BY: JJC

CKD BY: SAK

DWG# 16011-2509

D

RIGHT ANGLES ARE 90°
 ACUTE ANGLES RANGE FROM 1° - 89°
 OBTUSE ANGLES RANGE FROM 91° - 179°

