
- 1. Using the 36" straight edge provided, set it against the wall (as illustrated).
- 2. Using the 12" rule provided, measure the distance (rise) from the edge of the yardstick at the 18" mark straight in to the face of the parapet.
- 3. Repeat steps 1 and 2 in several more areas along the arch. Record these measurements in the boxes provided. We will calculate the radius from these measurements.

NOTE! If the measured rise dimensions vary by $\frac{1}{2}$ " or over, contact Joe Inzeo at (1-800-558-2162 - Ext 403) for further instructions

4. Fill in the general information below and fax this sheet back.

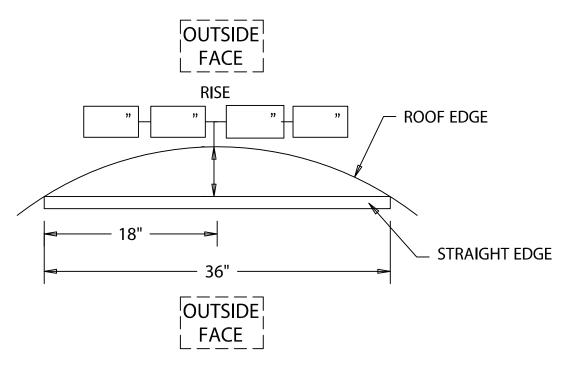

PLAN VIEW

NOTE! INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPIATE OUTSIDE FACE.

PROJECT:	Corporate Offices, Manufacturing 1600 Airport Road; Waukesha, WI 53188 Phone: 800-558-2162 Fax: 800-373-9156 www.metalera.com
ARCHITECT:	
ROOFING CONTRACTOR:	
REPRESENTATIVE/DISTRIBUTOR:	
METAL-ERA® Roof Edge Solutions	DATE: 09/12/05 SHT.# OF
	DRN BY: JJC
	CKD BY: SAK DWG# 11510-1500 A