



# NON 90° COPING MITERS

## OUTSIDE MITER - OBTUSE

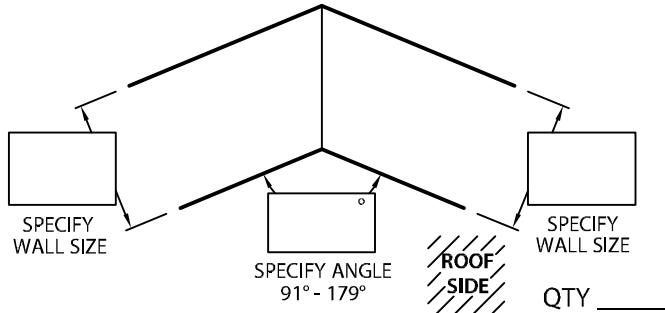


## OUTSIDE MITER - ACUTE

INTERNAL USE

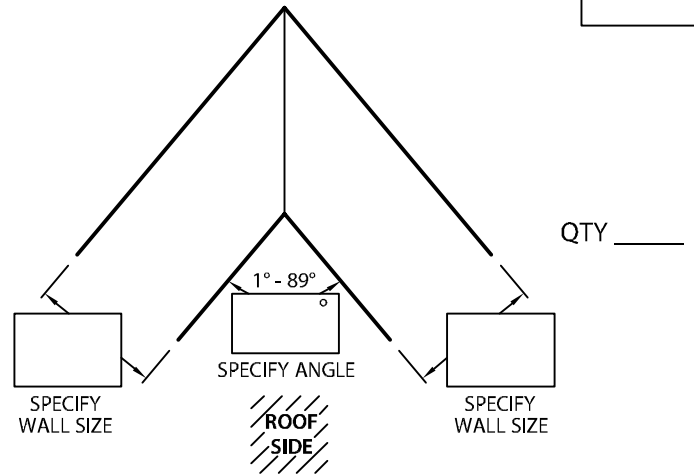


## INSIDE MITER - OBTUSE

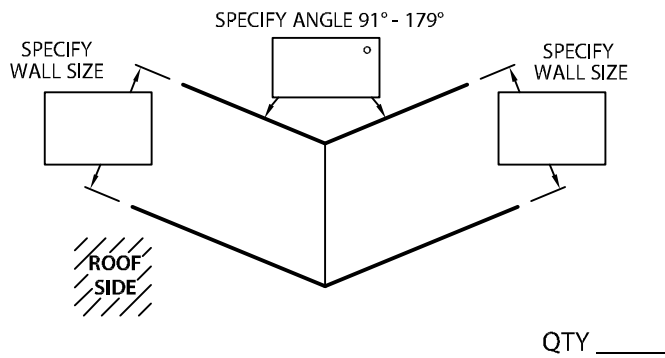

## INSIDE MITER - ACUTE

INTERNAL USE

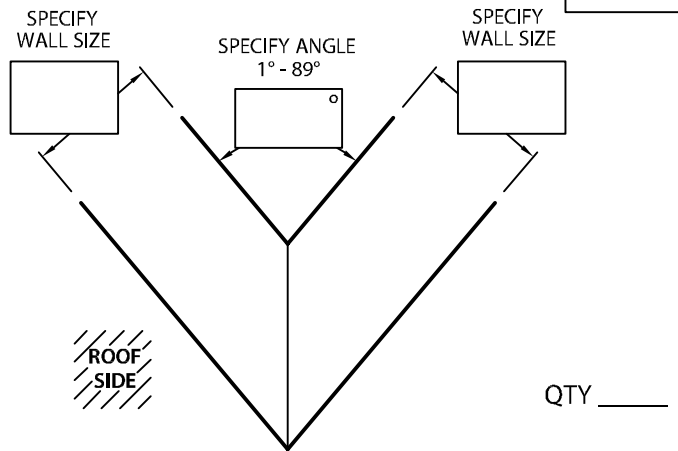

### NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

### MATERIAL:

- \_\_\_ 24 GA. GALVANIZED STEEL  
 \_\_\_ 22 GA. GALVANIZED STEEL  
 \_\_\_ .040" ALUMINUM  
 \_\_\_ .050" ALUMINUM  
 \_\_\_ .063" ALUMINUM  
 \_\_\_ OTHER \_\_\_\_\_

SPECIFY ACCESSORY TYPE:

- WELDED ①  
 QUICKLOCK

AUTHORIZED SIGNATURE:

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

COLOR: \_\_\_\_\_

FINISH: \_\_\_\_\_

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

CORPORATE OFFICES, MANUFACTURING  
 1600 AIRPORT ROAD; WAUKESHA, WI 53188  
 PHONE: 800-558-2162  
 FAX: 800-373-9156  
 WEBSITE: WWW.METALERA.COM  
 EMAIL: QUOTE@METALERA.COM



DATE: 10/14/16

SHT.# 1 OF 2

DRN BY: JJC

CKD BY: SAK

DWG# 11011-1487

G

# NON 90° COPING MITERS

RIGHT ANGLES ARE 90°  
ACUTE ANGLES RANGE FROM 1° - 89°  
OBTUSE ANGLES RANGE FROM 91° - 179°

