




ELEVATE WELDED RADIUS DRIP EDGE

WITH CONTINUOUS CLEAT

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS



OR

2.) FIELD CONDITION MEASUREMENTS


NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

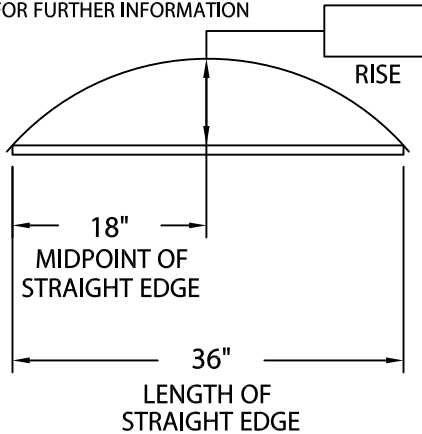

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY
CIRCLING APPROPRIATE OUTSIDE FACE

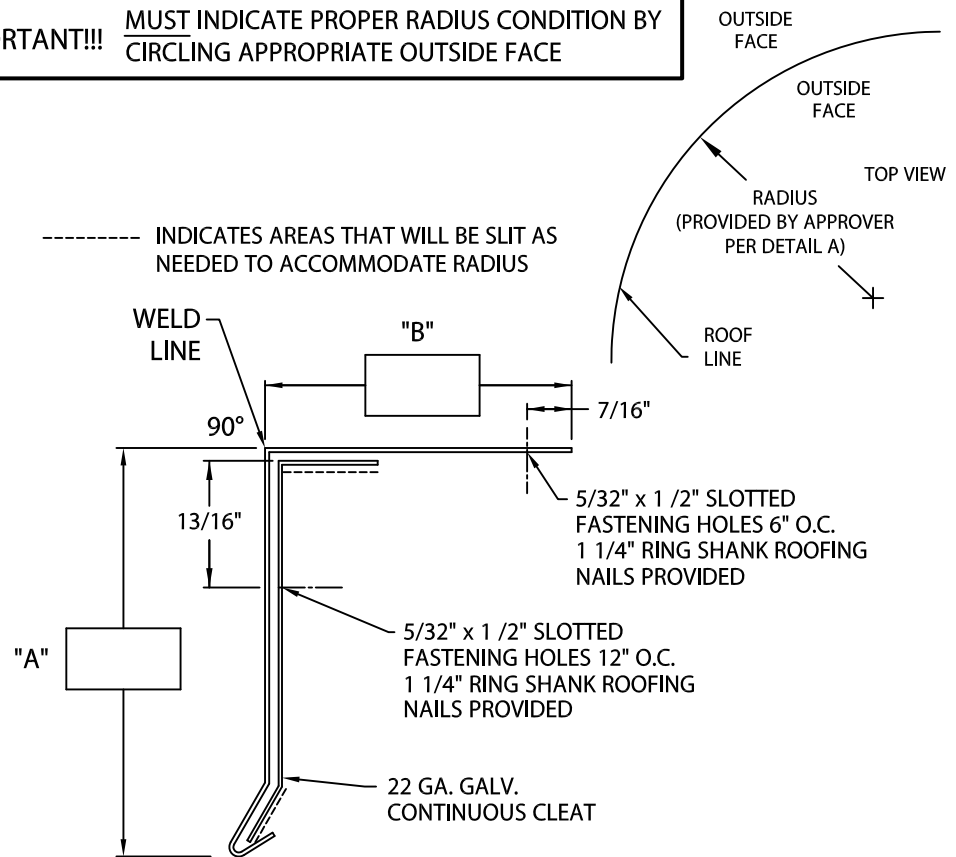

NOTES: -- 6" WIDE CONCEALED SPLICE PLATES PROVIDED.

-- CONCEALED SPLICE PLATE MUST BE FIELD CAULKED TO PREVENT WATER ENTRY.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Elevate's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

FLANGE - .080 ALUMINUM

FACE - .063" ALUMINUM

COLOR: _____

FINISH: _____

QUANTITIES:

_____ LINEAL FEET (4'-0" LENGTHS)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



ELEVATE
26 CENTURY BLVD.
SUITE 205
NASHVILLE, TN 37214

CONTACT YOUR LOCAL ELEVATE REPRESENTATIVE

DATE: 03/20/23

DRN BY: MLM

CKD BY: MM

SHT.# ____ OF ____

DWG# 13010-12421

D