

JM WR GUTTER OFFSET

NOTES

- Bottom sizes are provided in 1/2" increments
- Maximum downspout dimension not to exceed "B" minus 1-9/16"
- Roof flange is optional. If flange size is not provided, the gutter will not include a roof flange. If flange angle is not provided, the gutter will have a 90-degree flange.
- Pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050 aluminum.
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI GT-1 Test Pressure up to 223 psf (Horizontal) and 136 psf (Vertical)

APPROVALS

ANSI/SPRI/GT-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type: _____

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Johns Manville
EdgeMetal@jm.com
JM Switchboard USA: 303-978-2000
Technical: 800-922-5922 Option 3
Account Specialists: 877-766-3295
General Product Information Center:
800-654-3103

SHT #: _____ of _____


DATE: **06/20/25**

DRN BY : **PL**

CKD BY : **MM**

DWG # : **16012-38974**

REV: **B**

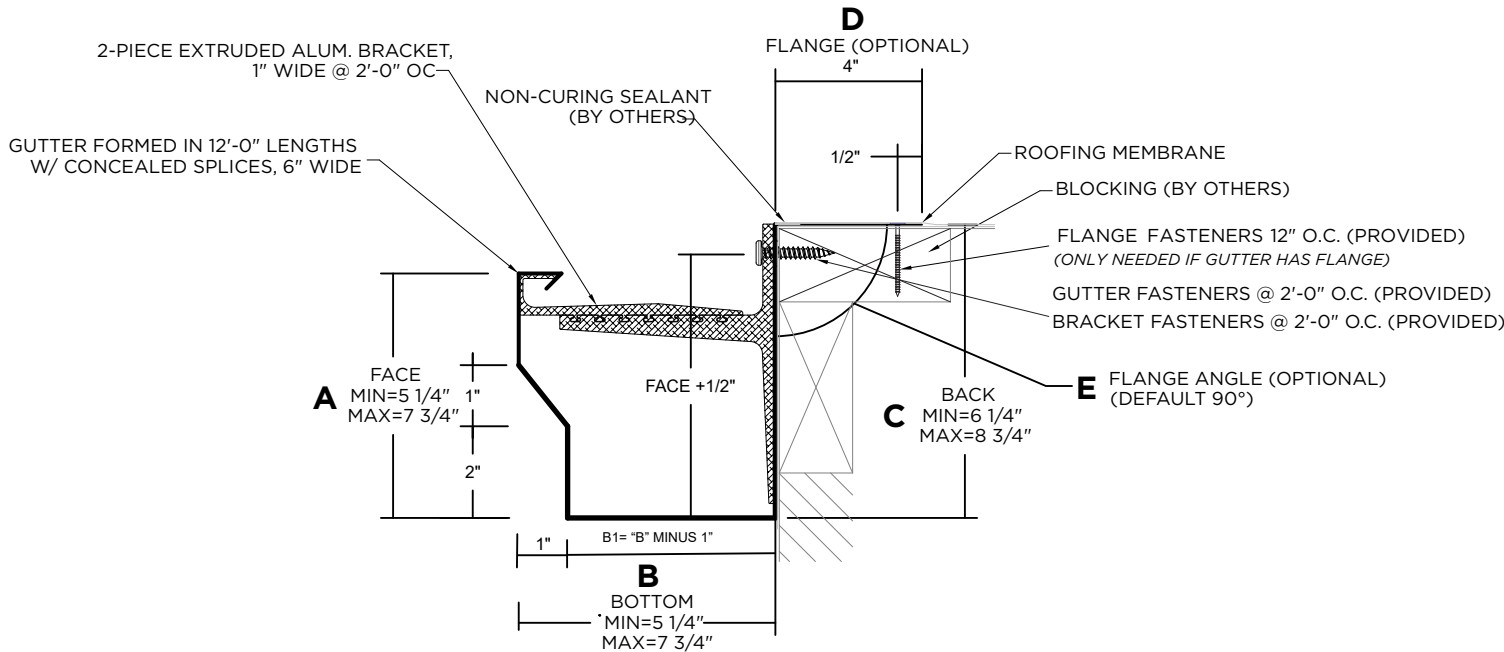

DIMENSIONS

SELECT SIZE	A (FACE)	B (BOTTOM)	C (BACK)	FLANGE (OPTIONAL)
☐	5 1/4"	5 1/4"	6 1/4"	D (FLANGE) PLEASE SELECT ONE:
☐	5 3/4"	5 3/4"	6 3/4"	WITH FLANGE ☐ WITHOUT FLANGE ☐
☐	6 1/4"	6 1/4"	7 1/4"	NOTE: IF NEITHER BOX IS CHECKED, THE GUTTER WILL BE PROVIDED WITHOUT A ROOF FLANGE
☐	6 3/4"	6 3/4"	7 3/4"	E (FLANGE ANGLE)
☐	7 1/4"	7 1/4"	8 1/4"	NOTE: IF ANGLE IS NOT PROVIDED, FLANGE WILL BE 90°
☐	7 3/4"	7 3/4"	8 3/4"	

MATERIAL

- ☐ 24 Ga. Galv. Steel
- ☐ 22 Ga. Galv. Steel
- ☐ .040" Aluminum
- ☐ .050" Aluminum
- ☐ .063" Aluminum
- ☐ OTHER: _____

Color: _____

Finish: _____

Substrate:
If substrate is not given, wood fasteners will be provided.

- ☐ Wood
- ☐ Masonry
- ☐ Metal

QUANTITIES

_____ Lineal Feet (12'-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)

_____ Right Endcaps



_____ Left Endcaps

_____ Expansion Joints (If Required)


Accessory Type: ☐ Quicklock (Default) ☐ Welded (Surcharge)

JM WR GUTTER


OFFSET STANDARD ACCESSORIES

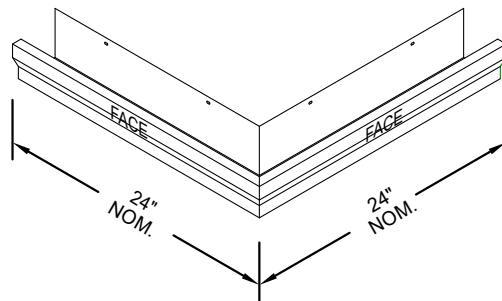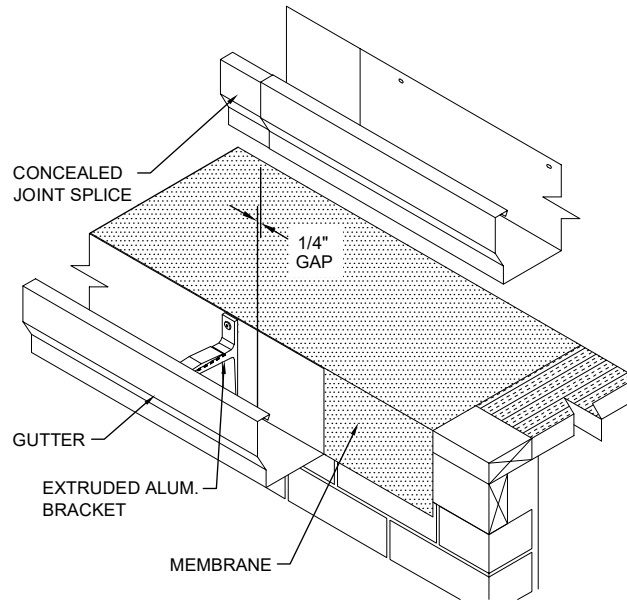

OUTSIDE MITER

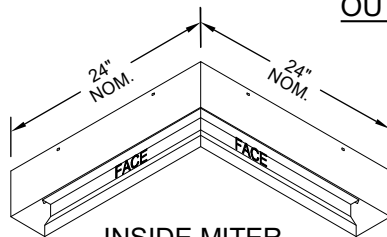


INSIDE MITER



END CAP

LEFT HAND SHOWN

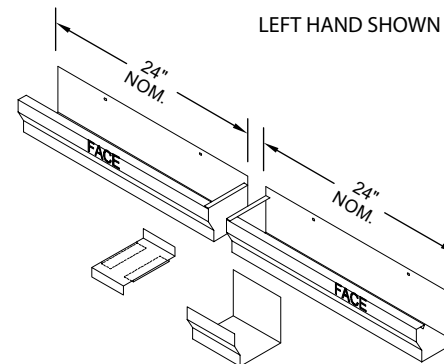

EXPANSION JOINT
(IF REQUIRED)

Standard gutter miter leg lengths are 24" Nominal
Standard gutter miter angle is 90°
For special miter requirements, attach sketches or consult manufacturer for assistance.

Johns Manville
EdgeMetal@jm.com
JM Switchboard USA: 303-978-2000
Technical: 800-922-5922 Option 3
Account Specialists: 877-766-3295
General Product Information Center:
800-654-3103

SHT #: _____ of _____

DATE: **06/20/25**

DRN BY : **PL**

CKD BY : **MM**

DWG # : **16012-38974**

REV: **B**