




## ENDURA<sup>™</sup>-EDGE RP BUILT-UP OR MODIFIED VERSION

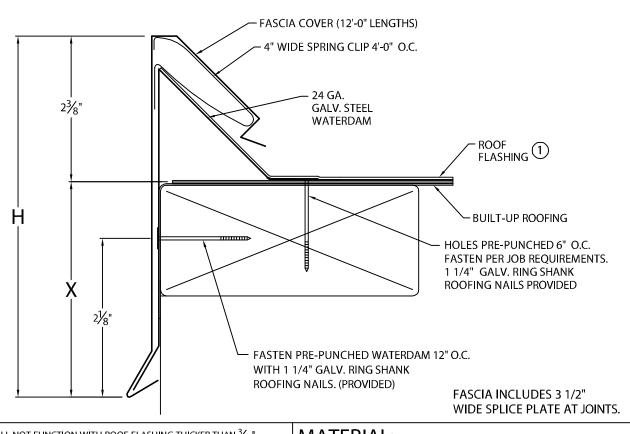

(1) STANDARD FASCIA WILL NOT FUNCTION WITH ROOF FLASHING THICKER THAN $\frac{9}{16}$ ".					MATERIAL:				
<ul> <li>② OIL CANNING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR FACE HEIGHTS ABOVE 81/4"</li> <li>③ WELDED ACCESSORIES REQUIRE A MINIMUM OF MATERIAL THICKNESS OF .050"</li> </ul>					24 GA. GALV. STEEL ②050" ALUMINUM040" ALUMINUM ②063" ALUMINUM				
NOTE: UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD.					OTHER COLOR: FINISH:				
Endura"-Edge RP Dimensions					QUANTITIES:				
PRODUCT ID. NO.  FA-350 FA-365 FA-380	H DI/ 5 1, 6 3, 8 1,	<mark>//</mark> 4" /4" /4"	X DIM 2 7/8" 4 3/8" 5 7/8"	NAILER COVERAGE 1 NAILER 2 NAILERS 3 NAILERS	( ( I	LINEAL FEET 12'-0" L OUTSIDE MITER(S) @ 90° NSIDE MITER(S) @ 90°	g 90°		
☐ FA-395 ☐ FA-3110 ☐ FA-3125	9 3, 11 1 12 1		7 3/8" 8 7/8" 10 3/8"	4 NAILERS 5 NAILERS 6 NAILERS	L	RIGHT ENDCAP(S) LEFT ENDCAP(S)		☐ WELDED ③ ☐ STANDARD	
ANSI/SPRI/FM 4435/ ES-1 FA-50 TO FA-80 IN .			0. PA-80 IN .050 OR	0 IN 24 GA. OR .040" - 196 psf 0 IN .050 OR .063" - 216 psf 25 IN .050 OR .063" - 116 psf		RIGHT ENDWALL FLASHING(S) LEFT ENDWALL FLASHING(S) OVERFLOW SCUPPER(S) STYLEAB			
AUTHORIZED SIGNATURE:					SPILLOUT SCUPPER(S) STYLEAB DOWNSPOUT SCUPPER(S) STYLEAB (X) SIZE A: TAPERED 1 1/2" DROP B: FLAT				
APPROVED BY:									
DATE:					FOR NON-90 MITERS SEE PRINT APPROVAL #11010-1103				
PROJECT:									
ARCHITECT:									
ROOFING CONTRACTOR:									
REPRESENTATIVE/DISTRIBUTOR:									
						DATE: 09/30/	16 S	HT.# OF	

PHONE: 800-794-2701 | DRN BY: JJC

CKD BY: SAK

DWG# 47010-21210