




# GENFLEX SNAP-ON FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

## \* NOTES

- Fascia cover provided with splice plates
- 3.5" face height only available in 24 ga. galv steel and .040" aluminum
- Face heights 9.25" and over only available in 22 ga. galv steel or .050" and .063" aluminum
- Pre-drill with 3/16" in. drill for masonry conditions
- Product cannot be installed on conditions smaller than 5 ft. radius
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 381 psf

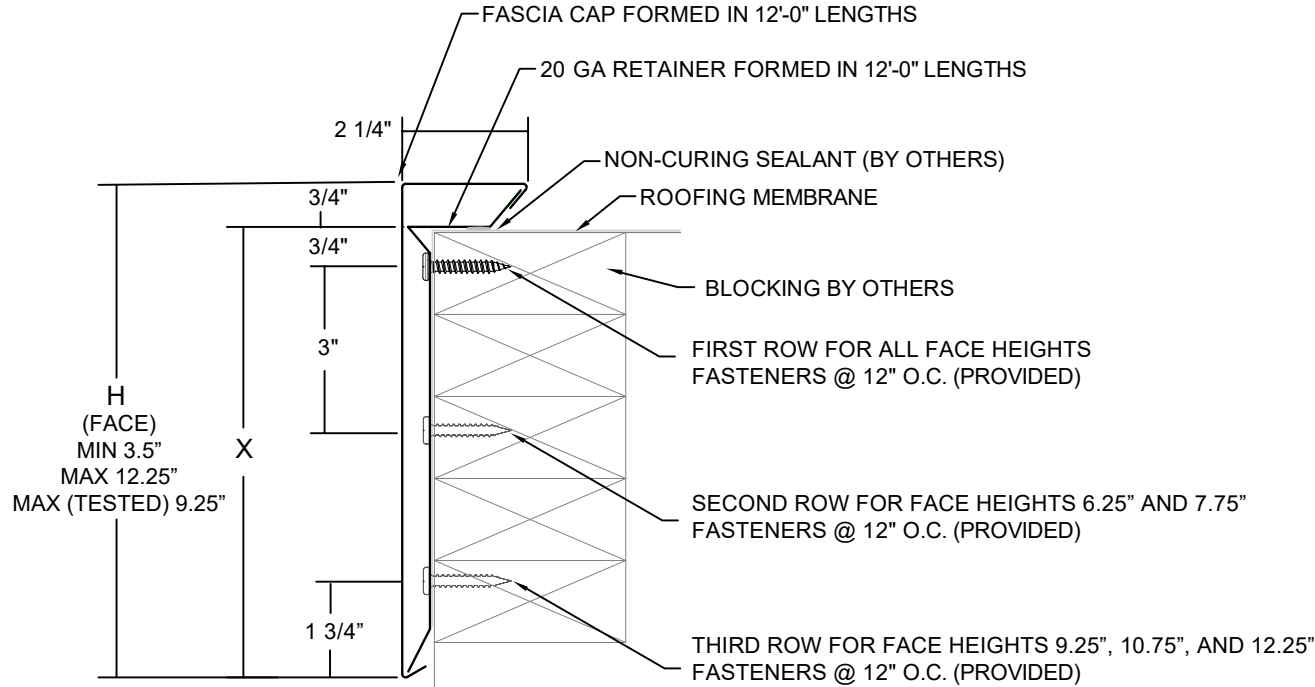

## APPROVALS



ANSI/SPRI/FM 4435/ES-1  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**GenFlex Roofing Systems**  
Customer Service  
Phone: 800-558-2162  
Fax: 800-373-9156  
www.metalera.com/genflex

SHT# \_\_\_\_\_ of \_\_\_\_\_

DATE: **12/13/ 23**

DRN BY: **PL**

CKD BY: **MM**

DWG #: **22010-36900**

REV: **B**

## DIMENSIONS

| PRODUCT ID. NO.                   | H DIM   | X DIM   | NAILER COVERAGE |
|-----------------------------------|---------|---------|-----------------|
| <input type="checkbox"/> TE-350*  | 3 1/2"  | 2 3/4"  | 1 NAILER        |
| <input type="checkbox"/> TE-475   | 4 3/4"  | 4"      | 2 NAILERS       |
| <input type="checkbox"/> TE-625   | 6 1/4"  | 5 1/2"  | 3 NAILERS       |
| <input type="checkbox"/> TE-775   | 7 3/4"  | 7"      | 4 NAILERS       |
| <input type="checkbox"/> TE-925*  | 9 1/4"  | 8 1/2"  | 5 NAILERS       |
| <input type="checkbox"/> TE-1075* | 10 3/4" | 10"     | 6 NAILERS       |
| <input type="checkbox"/> TE-1225* | 12 1/4" | 11 1/2" | 7 NAILERS       |

## MATERIAL

- 24 Ga. Galv. Steel      Color: \_\_\_\_\_
- 22 Ga. Galv. Steel      Finish: \_\_\_\_\_
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: \_\_\_\_\_
- Substrate:**  Wood  
If substrate is not given, wood fasteners will be provided.  Masonry  
 Metal

## QUANTITIES

- \_\_\_\_\_ Straight Lineal Feet (12'-0" Lengths)      \_\_\_\_\_ Right Endcaps
- \_\_\_\_\_ Radius Lineal Feet (4'-0" Lengths)\*      \_\_\_\_\_ Left Endcaps
- \_\_\_\_\_ Outside Miter (90°) (Cover Only)      \_\_\_\_\_ Right Endwall Flashing
- \_\_\_\_\_ Inside Miter (90°) (Cover Only)      \_\_\_\_\_ Left Endwall Flashing
- \_\_\_\_\_ Downspout Scupper
- \_\_\_\_\_ Spillout Scupper