


# SECUREDGE ONE COPING

TAPERED VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF 160 psf FOR GALV. STEEL MATERIAL - 200 psf FOR ALUMINUM MATERIAL

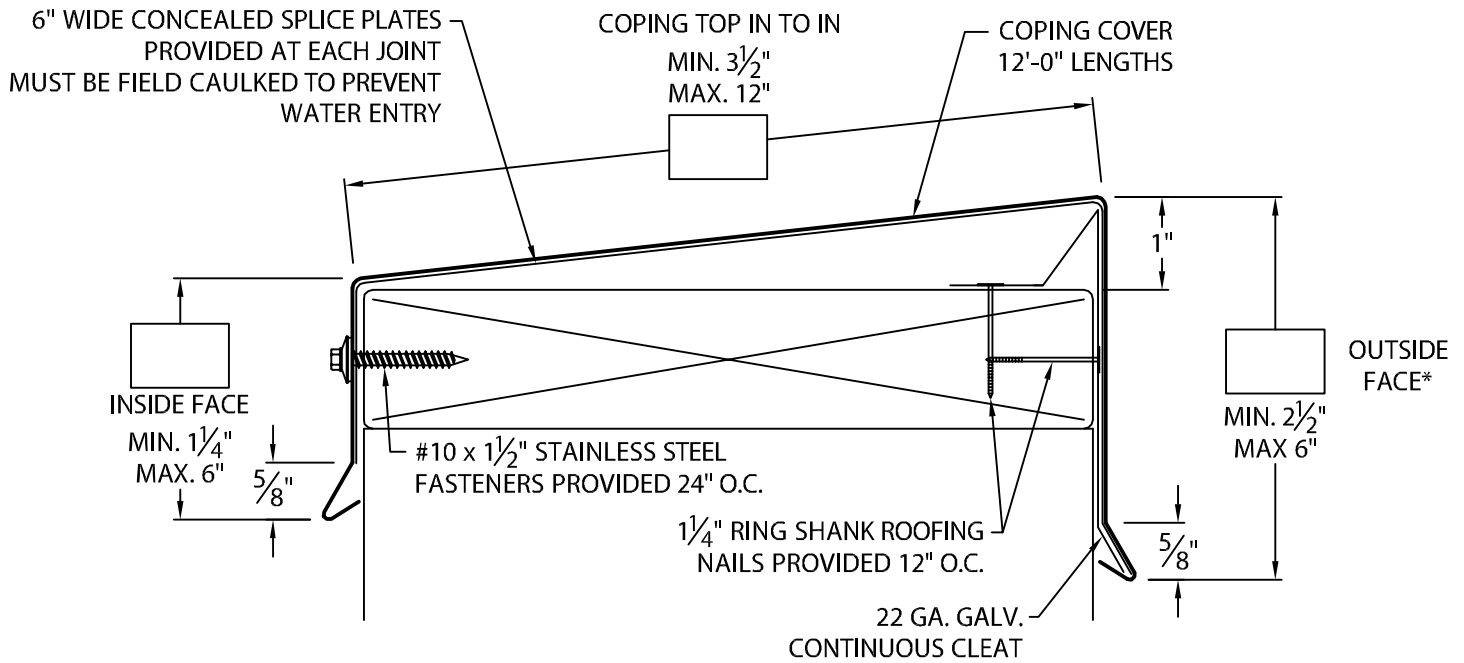

\*OUTSIDE FACE DIMENSION CANNOT BE LARGER THAN IN TO IN DIMENSION

-- CONCEALED SPLICE PLATES MUST BE FIELD CAULKED TO PREVENT WATER ENTRY.  
-- WELDED ACCESSORIES REQUIRE A MIN. MATERIAL THICKNESS OF .050"

## MATERIAL:

\_\_\_ 24 GA. GALVANIZED STEEL  
\_\_\_ .040" ALUMINUM  
\_\_\_ .050" ALUMINUM  
\_\_\_ .063" ALUMINUM  
\_\_\_ OTHER \_\_\_\_\_

COLOR: \_\_\_\_\_  
FINISH: \_\_\_\_\_

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Carlisle SynTec, Inc.'s printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ LINEAL FEET 12'-0" LENGTHS  
\_\_\_\_\_ OUTSIDE MITERS @ 90°  
\_\_\_\_\_ INSIDE MITERS @ 90°  
\_\_\_\_\_ RIGHT ENDCAPS  
\_\_\_\_\_ LEFT ENDCAPS

SPECIFY ACCESSORY TYPE:  
 WELDED  
 QUICKLOCK

FOR NON-90° MITERS SEE PRINT APPROVAL #15011-1677

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service  
866-458-3537  
(Metal-Era)



DATE: 04/26/17

DRN BY: JJC

CKD BY: SAK

SHT.# \_\_\_ OF \_\_\_

DWG# 15011-10776

C