



NON 90° COPING MITERS

OUTSIDE MITER - OBTUSE

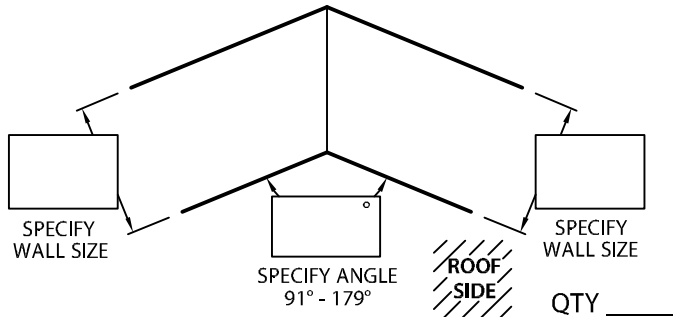


OUTSIDE MITER - ACUTE

INTERNAL USE

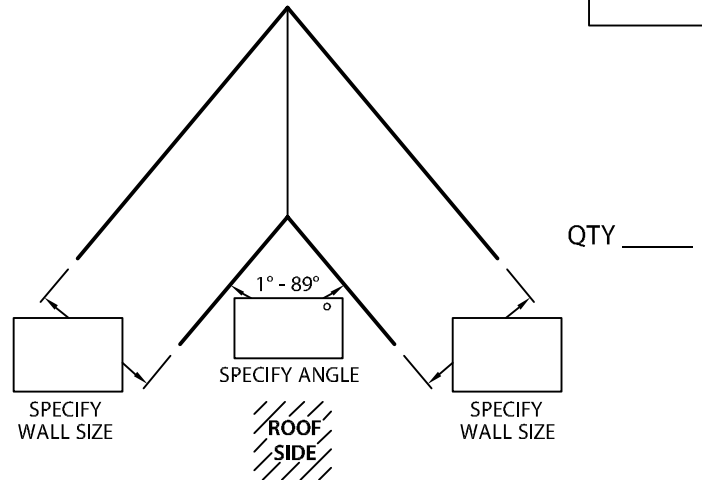


INSIDE MITER - OBTUSE

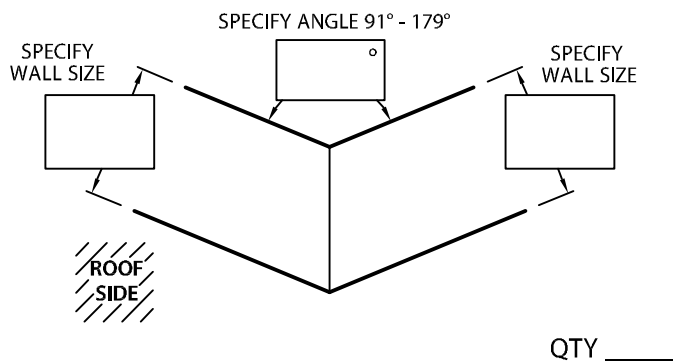

INSIDE MITER - ACUTE

INTERNAL USE

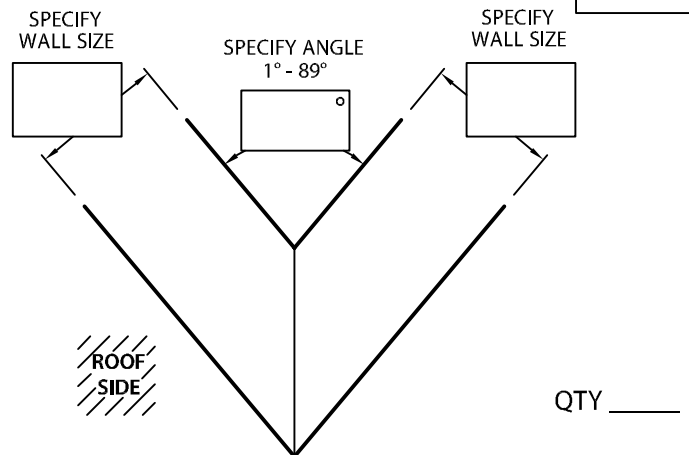

NOTES:

— FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

___ 24 GA. GALVANIZED STEEL
___ 22 GA. GALVANIZED STEEL
___ .040" ALUMINUM
___ .050" ALUMINUM
___ .063" ALUMINUM
___ OTHER _____

SPECIFY ACCESSORY TYPE:

- ☐ WELDED ①
☐ QUICKLOCK

COLOR: _____

FINISH: _____

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

CUSTOMER SERVICE
800-558-2162
(METAL-ERA)



DATE: 10/19/16

DRN BY: JJC

CKD BY: SAK

SHT.# 1 OF 2

DWG# 18011-2046

E

NON 90° COPING MITERS

RIGHT ANGLES ARE 90°
ACUTE ANGLES RANGE FROM 1° - 89°
OBTUSE ANGLES RANGE FROM 91° - 179°

