



PRESTO-TITE RADIUS FASCIA

BUILT-UP OR MODIFIED VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS

_____ ' FEET _____ " INCHES

OR


2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

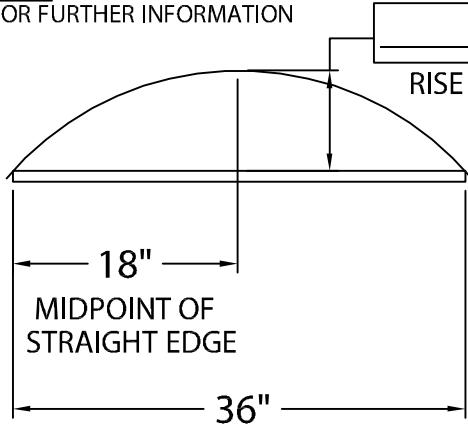

MINIMUM OF 5'-0"
(CALL IF LESS)
* RADIUS PRODUCT NOT
REQUIRED IF OVER 200'-0"

MAXIMUM OF 2 3/4"
(CALL IF MORE)
* RADIUS PRODUCT
NOT REQUIRED IF 1/16"
OR UNDER

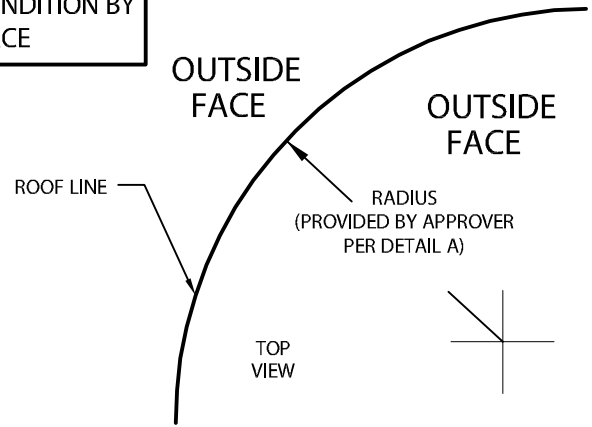

--- INDICATES AREAS THAT WILL BE SLIT AS
NEEDED TO ACCOMODATE RADIUS

FASCIA COVER WILL
BE PROVIDED IN 6'-0"
OR 12'-0" LENGTHS,
DEPENDING ON
RADIUS CONDITION

FLANGE WELDED WHEN
RADIUS IS LESS THAN 26'-0"

* RADIUS EXTRUDED BAR
PROVIDED IN 4'-0" LENGTHS
IF RADIUS IS LESS THAN 26'-0"

* RADIUS EXTRUDED BAR
PROVIDED IN 12'-0" LENGTHS IF
RADIUS IS 26'-0" OR GREATER.

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

PRESTO-TITE RADIUS FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM.	X DIM.	COVERAGE
<input type="checkbox"/> PFM-55	5 1/2"	4 1/4"	1 NAILER
<input type="checkbox"/> PFM-70	7"	5 3/4"	2 NAILERS
<input type="checkbox"/> PFM-85	8 1/2"	7 1/4"	4 NAILERS

Fabrication will proceed only after receipt of
signed print approval.

Print Approval:

Architect and/or contractor shall verify all
dimensions, sizes and quantities. All products
to be installed in strict accordance with
Johns Manville's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

___ 24 Ga. Galv. Steel
___ .040" Aluminum
___ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet 12'-0" Lengths

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

51 Lexington Street; Lewiston, ME 04240

CUSTOMER SERVICE: 800-223-8317 USA

800-445-1500 Canada

TECHNICAL SERVICE: 800-445-1500 USA & Canada

FAX: 207-784-0125

OTHER AREAS CALL: 207-784-0123



DATE: 03/20/17

DRN BY: JJC

CKD BY: SAK

SHT.# ___ OF ___

DWG# 16010-2184

G