




ANCHOR-TITE FASCIA

ANSI / SPRI ES-1 WIND BLOW-OFF RESISTANCE OF UP TO 275 LBS./SQ.FT.

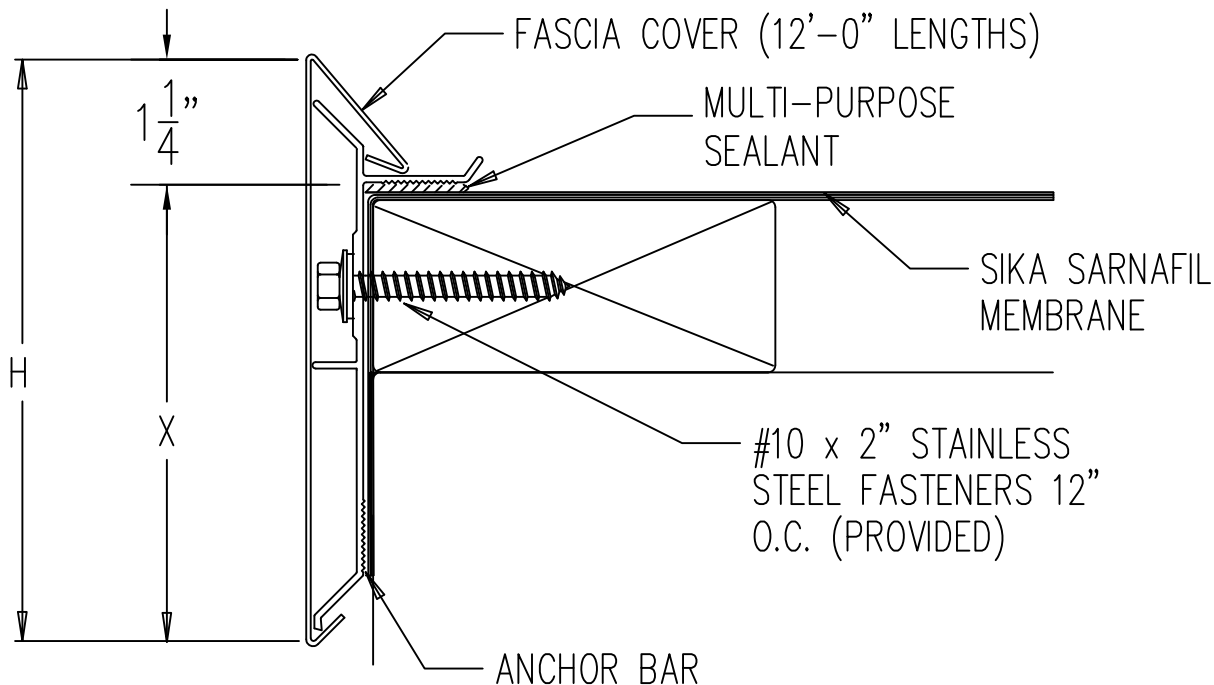

Fascia is to be installed per Specifications and Sika Sarnafil's Installation Instructions Dwg. # 14110-2829

ANCHOR-TITE FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> AF-S40	4"	2 3/4"	1 NAILER
<input type="checkbox"/> AF-S55	5 1/2"	4 1/4"	2 NAILERS
<input type="checkbox"/> AF-S70	7"	5 3/4"	3 NAILERS
<input type="checkbox"/> AF-S85	8 1/2"	7 1/4"	4 NAILERS

METALS:

___ 24 Ga. Galv. Steel
___ .040" Aluminum
___ OTHER _____

Color: _____ Finish: _____

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes, and quantities. All products to be installed in strict accordance with Sika Sarnafil printed instructions.

Approved by: _____

Date: _____

QUANTITIES:

_____ Lineal Feet (12'-0" Lengths)
___ Outside Miter(s) @ _____ 90°
___ Inside Miter(s) @ _____ 90°
___ Overflow Scupper Style ___ A ___ B
___ Spillout Scupper Style ___ A ___ B
___ Downspout Scupper Style ___ A ___ B
(___ X ___) Size A: Tapered 1 1/2" Drop
B: Flat

FOR NON-90 MITERS SEE PRINT APPROVAL #14010-2823

PROJECT

ARCHITECT

ROOFING CONTRACTOR

REPRESENTATIVE/DISTRIBUTOR

Sika Sarnafil Inc.
100 Dan Road
Canton, MA 02021
(800) 451-2504
Fax: (781) 828-5365
www.metalera.com/sikasarnafil



DATE: 03/27/17

DRN BY: JAB

CKD BY: SAK

SHT.# ___ OF ___

DWG# 14010-2828

G