


# DOW STANDARD FASCIA

ANSI/SPRI ES-1 DESIGN PRESSURE OF 290 psf

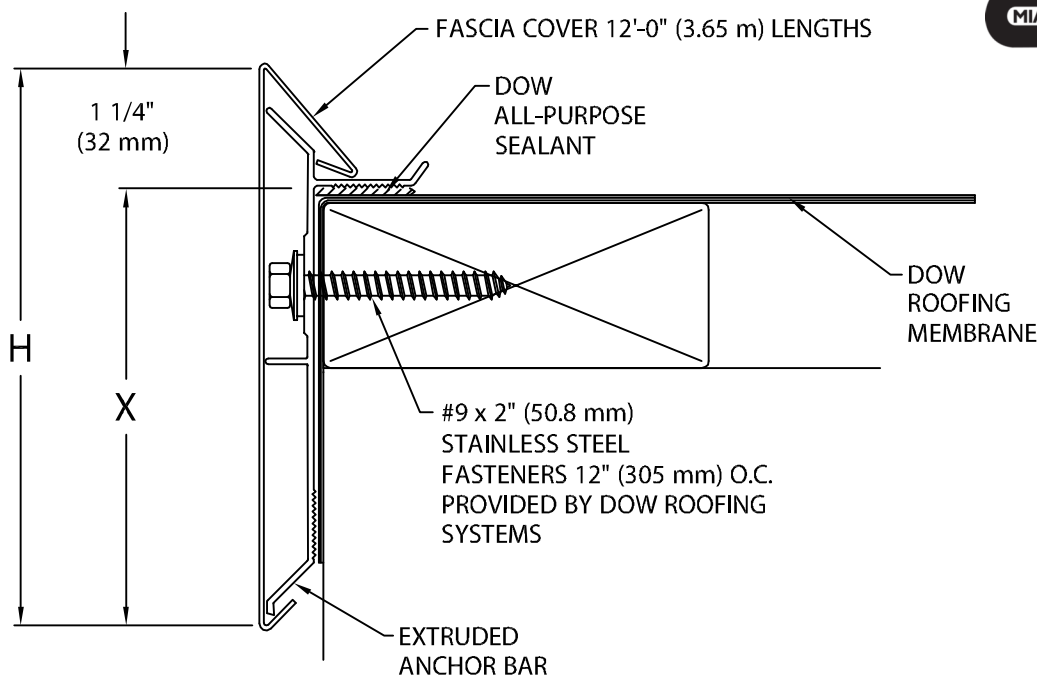

MIAMI-DADE COUNTY  
APPROVED

Fascia is to be installed per Specifications and Dow Roofing Systems' Installation Instructions Dwg. # 12110-2877

## DOW STANDARD FASCIA DIMENSIONS

NOA NO. 08-0604.02  
MIAMI-DADE COUNTY, FLORIDA  
12/11/13

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> SB-40	4" (102 mm)	2 3/4" (70 mm)	1 NAILER
<input type="checkbox"/> SB-55	5 1/2" (140 mm)	4 1/4" (108 mm)	2 NAILERS
<input type="checkbox"/> SB-70	7" (178 mm)	5 3/4" (146 mm)	3 NAILERS
<input type="checkbox"/> SB-85	8 1/2" (216 mm)	7 1/4" (184 mm)	4 NAILERS

Fabrication will proceed only after receipt of  
signed print approval.

## Print Approval:

Architect and/or contractor shall verify all  
dimensions, sizes and quantities. All products  
to be installed in strict accordance with  
Dow Roofing Systems' printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

## MATERIAL:

\_\_\_ 24 Ga. (.65 mm) Galv. Steel

\_\_\_ .040" (1.01 mm) Aluminum

\_\_\_ OTHER \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ Lineal Feet (12'-0" (3.65 m) Lengths)

\_\_\_\_\_ Outside Miters @ (\_\_\_\_\_)°

\_\_\_\_\_ Inside Miters @ (\_\_\_\_\_)°

\_\_\_\_\_ Overflow Scupper Style \_\_\_A\_\_\_B

\_\_\_\_\_ Spillout Scupper Style \_\_\_A\_\_\_B

\_\_\_\_\_ Downspout Scupper Style \_\_\_A\_\_\_B

(\_\_\_X\_\_\_) Size

A: Tapered 1 1/2" (38 mm) Drop  
B: Flat

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Corporate Offices  
Dow Roofing Systems  
Nine Sullivan Road  
Holyoke, MA 01040  
P: 800-621-ROOF



ROOFING SYSTEMS

DATE: 03/01/12

DRN BY: JJC

CKD BY: SAK

SHT.# \_\_\_ OF \_\_\_

DWG# 12010-2876

F