



NON 90° COPING MITERS

OUTSIDE MITER - OBTUSE

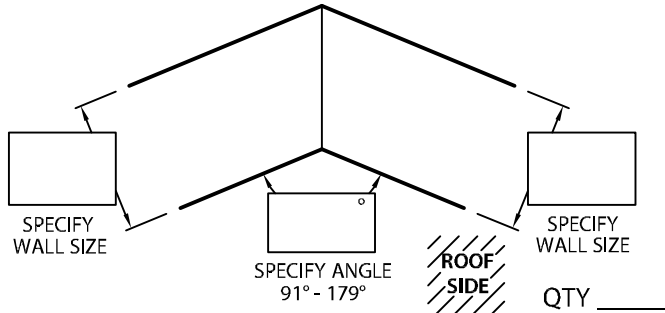


OUTSIDE MITER - ACUTE

INTERNAL USE

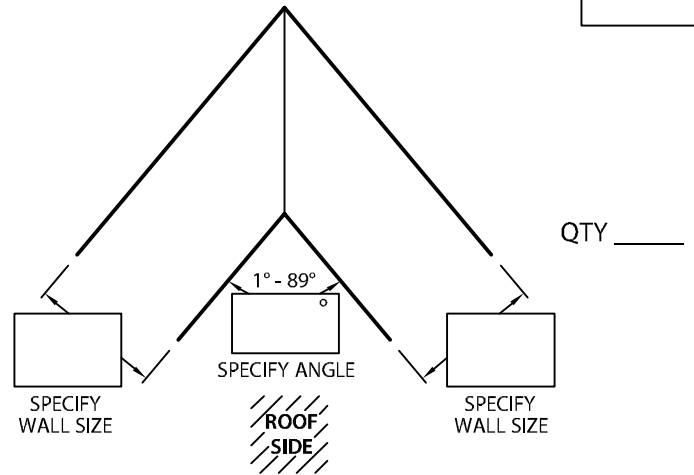


INSIDE MITER - OBTUSE

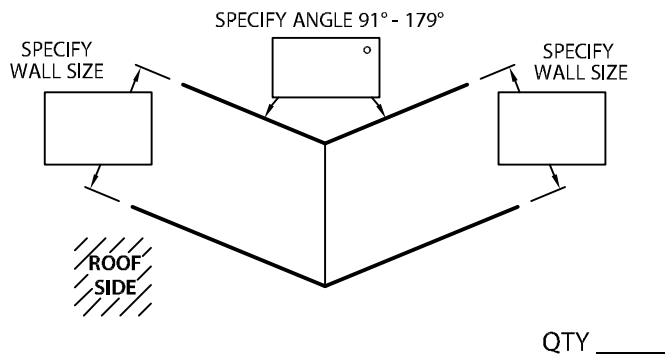

INSIDE MITER - ACUTE

INTERNAL USE

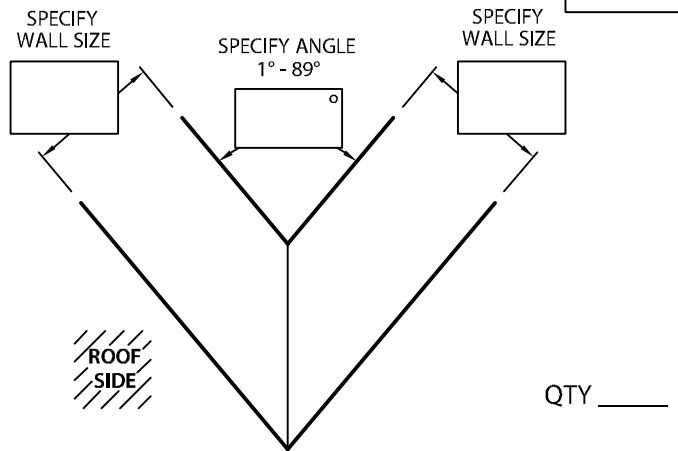

NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.

MATERIAL: ①

- ___ 24 GA. GALVANIZED STEEL
 ___ 22 GA. GALVANIZED STEEL
 ___ .040" ALUMINUM

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

COLOR: _____

FINISH: _____

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



PHONE: 800-794-2701

DATE: 10/19/16

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 47011-21257

B

NON 90° COPING MITERS

RIGHT ANGLES ARE 90°
ACUTE ANGLES RANGE FROM 1° - 89°
OBTUSE ANGLES RANGE FROM 91° - 179°

