


FIRESTONE DRIP EDGE

OVER 6" TO 10" FACE HEIGHT WITH CONTINUOUS CLEAT VERSION

ANSI/SPRI/FM 4435/ ES-1 DESIGN PRESSURE OF 177 psf

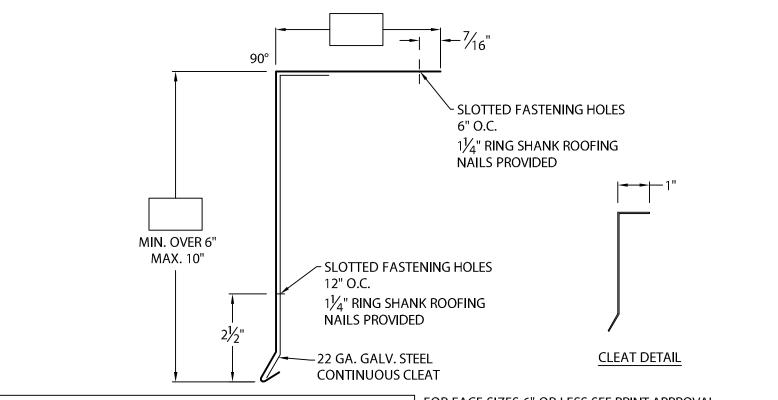

NOTES:

- -- INCLUDES 6" WIDE CONCEALED SPLICE PLATES.
- -- CONCEALED SPLICE PLATES MUST BE FIELD CAULKED TO PREVENT WATER ENTRY.
- -- UNLESS OTHERWISE NOTES, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Firestone's printed instructions.

Approved by:	
Date:	_

FOR FACE SIZES 6" OR LESS SEE PRINT APPROVAL #13010-1290

 WELDED	MITERS	AND A	ACCESSOF	RIES

CHECK ONE	REQUIRED (SURCHARGE)	NOT APPLICABLE
-----------	----------------------	----------------

MA	Т	FR	Δ 15	
1 V I /	7 I		\I/\	┕∙

.040"	ALUMINUM	1

.050"	AΙ	H	M	NΙ	IM

.063"	ΔΙ	LIA	ΛIN	LIA

 ıĸ	uc	н.	

COLOR:

С	T	Н	Ε	R	

QUANTITIES:

LINEAL	FEET	12'-0"	LENGTHS	

_____ OUTSIDE MITERS @ 90°

INSIDE MITERS @ 90°

FOR NON 90° MITERS SEE PRINT APPROVAL #13010-1043

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



EDGEGARD SYSTEMS PHONE: 800-872-0203 FAX: 800-770-3934 DATE: 09/29/16 DRN BY: JJC

CKD BY: SAK

SHT.#

NCU

OF

DWG# 13010-24948