



# DERBI-ANCHOR RADIUS FASCIA

**IMPORTANT!!!** MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS  
THE RADIUS MAY BE PROVIDED  
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS

\_\_\_\_\_ ' FEET \_\_\_\_\_ " INCHES

OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET  
FOR FURTHER INFORMATION

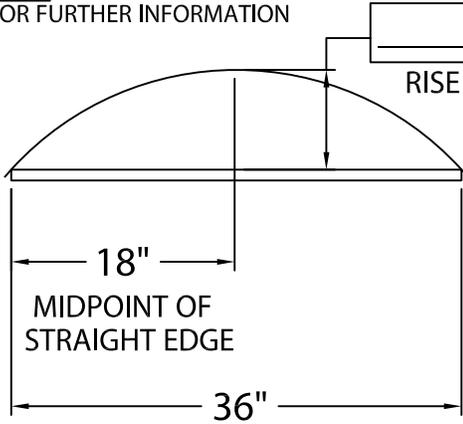


\_\_\_\_\_ " INCHES

RISE  
MAXIMUM OF 2 3/4"  
(CALL IF MORE)  
\* RADIUS PRODUCT  
NOT REQUIRED IF 1/16"  
OR UNDER


LENGTH OF  
STRAIGHT EDGE

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.


DETAIL A

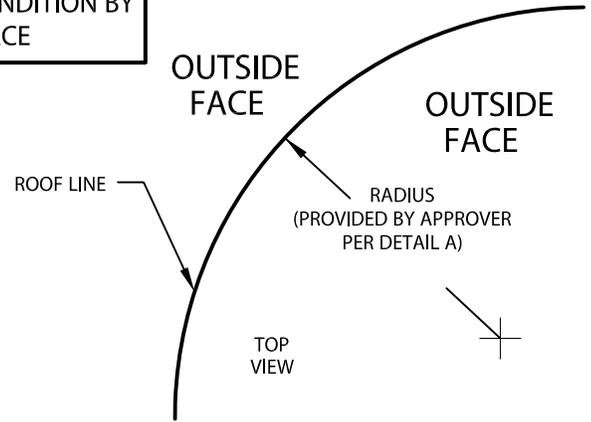

--- INDICATES AREAS THAT WILL BE SLIT AS  
NEEDED TO ACCOMMODATE RADIUS



FASCIA COVER WILL  
BE PROVIDED IN 6'-0"  
OR 12'-0" LENGTHS,  
DEPENDING ON  
RADIUS CONDITION



FLANGE WELDED WHEN RADIUS  
IS LESS THAN 26'-0"

\* RADIUS EXTRUDED BAR  
PROVIDED IN 4'-0" LENGTHS IF  
RADIUS IS LESS THAN 26'-0".

\* RADIUS EXTRUDED BAR  
PROVIDED IN 12'-0" LENGTHS IF  
RADIUS IS 26'-0" OR GREATER.

## DERBI-ANCHOR RADIUS FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM.	X DIM.	COVERAGE
<input type="checkbox"/> AFM-55	5 1/2"	4 1/4"	1 NAILER
<input type="checkbox"/> AFM-70	7"	5 3/4"	2 NAILERS
<input type="checkbox"/> AFM-85	8 1/2"	7 1/4"	4 NAILERS

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Derbigum's printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

## MATERIAL:

\_\_\_ 24 Ga. Galv. Steel  
\_\_\_ .040" Aluminum  
\_\_\_ OTHER \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ Lineal Feet 12'-0" Lengths

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service  
1-800-727-9872



DATE: 03/29/19

DRN BY: ZS

CKD BY: SAK

SHT.# \_\_\_ OF \_\_\_

DWG# 20010-25634

C