


## **VERSITRIM 3000 FASCIA**

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

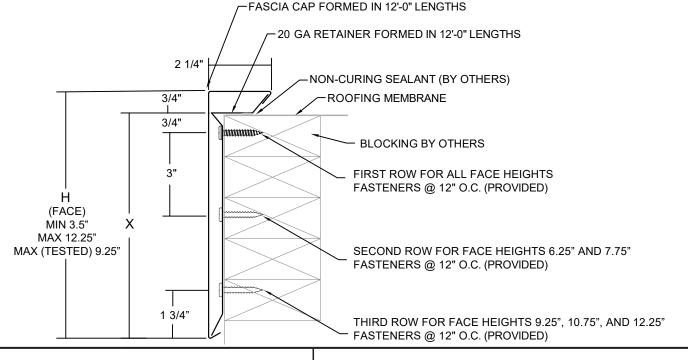

## **DIMENSIONS**

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ TE-350*	3 1/2"	2 3/4"	1 NAILER
☐ TE-475	4 3/4"	4"	2 NAILERS
☐ TE-625	6 1/4"	5 1/2"	3 NAILERS
☐ TE-775	7 3/4"	7"	4 NAILERS
☐ TE-925*	9 1/4"	8 1/2"	5 NAILERS
☐ TE-1075*	10 3/4"	10"	6 NAILERS
☐ TE-1225*	12 1/4"	11 1/2"	7 NAILERS

## **MATERIAL**

24 Ga. Galv. Stee
22 Ga. Galv. Stee
.040" Aluminum
☐ .050" Aluminum
☐.063" Aluminum

OTHER: \_\_\_\_

Color: \_\_\_\_\_\_ Finish: \_\_\_\_\_

Substrate: ☐ Wood

If substrate is not given, wood fasteners will be provided. ☐ Metal

## **QUANTITIES**

\_\_\_\_\_ Straight Lineal Feet (12'-0" Lengths)

Radius Lineal Feet (4'-0" Lengths)\*

\_\_\_\_\_ Outside Miter (90°) (Cover Only)

\_\_\_\_\_ Inside Miter (90°) (Cover Only)

# Right Endcaps

\_\_\_\_\_ Left Endcaps

Right Endwall Flashing

\_\_\_\_\_ Left Endwall Flashing

\_\_\_\_\_ Downspout Scupper

\_\_\_\_\_ Spillout Scupper

#### \* NOTES

- Fascia cover provided with splice plates
- 3.5" face height only available in 24 ga. galv steel and .040" aluminum
- Face heights 9.25" and over only available in 22 ga. galv steel or .050" and .063" aluminum
- Pre-drill with 3/16" in. drill for masonry conditions
- Product cannot be installed on conditions smaller than 5 ft. radius
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 381 psf

### **APPROVALS**





DATE: \_\_\_\_12/13/ 23

DRN BY: PL

CKD BY: MM

DWG #: 18010-36902

ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

### **PROJECT INFO**

printed instructions.

Date:

Versico

Customer Service

800-558-2162

(Metal-Era)

Projec	ct Name:	
Archit	tect:	
Roofi	ng Contractor:	
Proj	ect Type:	
	By selecting this box confirmed that dimen	you have verified and Isions, sizes, and quantitie