




# ELEVATE WR GUTTER OFFSET

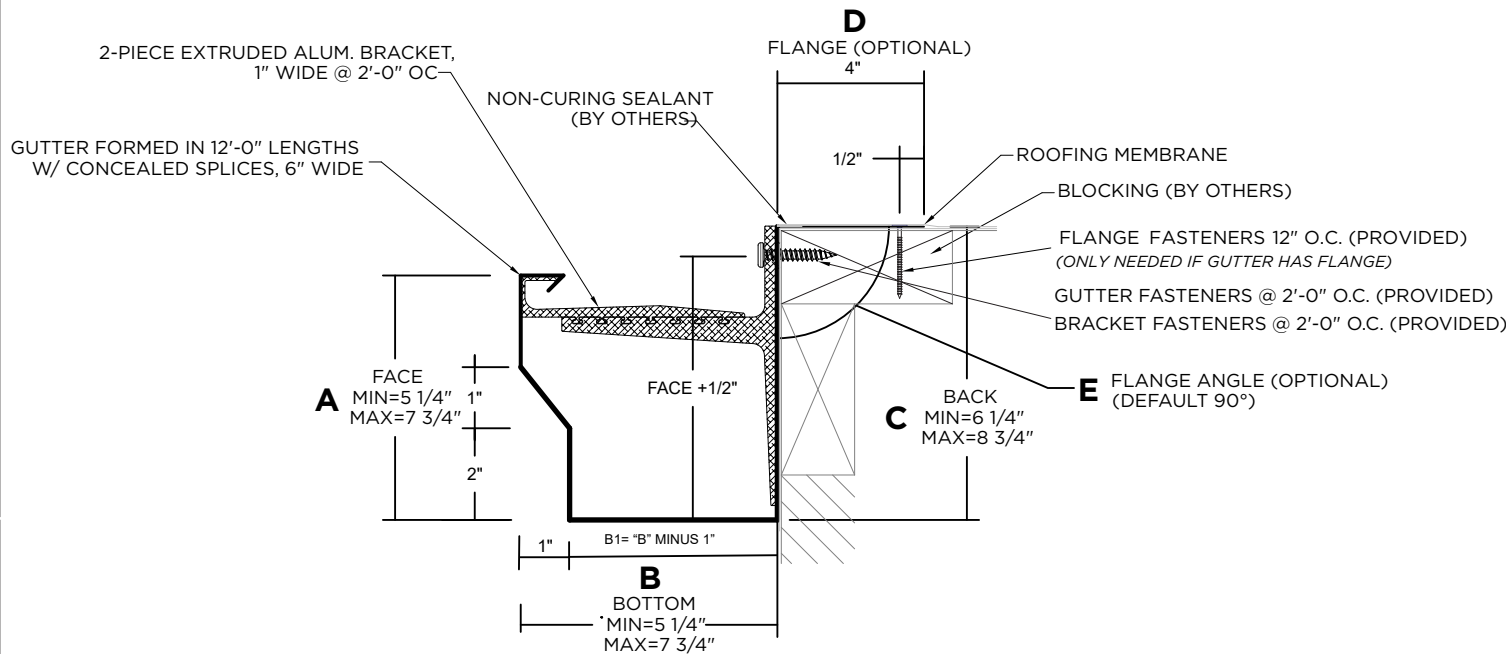

## DIMENSIONS

| SELECT SIZE              | A (FACE) | B (BOTTOM) | C (BACK) | FLANGE (OPTIONAL)                                                                                                                                                                                                                                                                                  |
|--------------------------|----------|------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> | 5 1/4"   | 5 1/4"     | 6 1/4"   | <b>D (FLANGE)</b> PLEASE SELECT ONE:<br>WITH FLANGE <input type="checkbox"/> WITHOUT FLANGE <input type="checkbox"/><br>NOTE: IF NEITHER BOX IS CHECKED, THE GUTTER WILL BE PROVIDED <b>WITHOUT</b> A ROOF FLANGE<br><b>E (FLANGE ANGLE)</b><br>NOTE: IF ANGLE IS NOT PROVIDED, FLANGE WILL BE 90° |
| <input type="checkbox"/> | 5 3/4"   | 5 3/4"     | 6 3/4"   |                                                                                                                                                                                                                                                                                                    |
| <input type="checkbox"/> | 6 1/4"   | 6 1/4"     | 7 1/4"   |                                                                                                                                                                                                                                                                                                    |
| <input type="checkbox"/> | 6 3/4"   | 6 3/4"     | 7 3/4"   |                                                                                                                                                                                                                                                                                                    |
| <input type="checkbox"/> | 7 1/4"   | 7 1/4"     | 8 1/4"   |                                                                                                                                                                                                                                                                                                    |
| <input type="checkbox"/> | 7 3/4"   | 7 3/4"     | 8 3/4"   |                                                                                                                                                                                                                                                                                                    |

## MATERIAL

- ☐ 24 Ga. Galv. Steel  
☐ 22 Ga. Galv. Steel  
☐ .040" Aluminum  
☐ .050" Aluminum  
☐ .063" Aluminum  
☐ OTHER: \_\_\_\_\_

Color: \_\_\_\_\_  
Finish: \_\_\_\_\_

Substrate: \_\_\_\_\_  
If substrate is not given, wood fasteners will be provided.  
☐ Wood  
☐ Masonry  
☐ Metal

## QUANTITIES

\_\_\_\_\_ Lineal Feet ( 12'-0" Lengths)  
\_\_\_\_\_ Outside Miter (90°)  
\_\_\_\_\_ Inside Miter (90°)  
\_\_\_\_\_ Right Endcaps  
\_\_\_\_\_ Left Endcaps  
\_\_\_\_\_ Expansion Joints (If Required)

Accessory Type: ☐ Quicklock (Default) ☐ Welded (Surcharge)

## NOTES

- Bottom sizes are provided in 1/2" increments
- Maximum downspout dimension not to exceed "B" minus 1-9/16"
- Roof flange is optional. If flange size is not provided, the gutter will not include a roof flange. If flange angle is not provided, the gutter will have a 90-degree flange.
- Pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are provided with a non- penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050 aluminum.
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI GT-1 Test Pressure up to 223 psf (Horizontal) and 136 psf (Vertical)

## APPROVALS

MIAMI-DADE COUNTY  
APPROVED

ANSI/SPRI/GT-1  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

Project Type: \_\_\_\_\_

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_



**Elevate**  
26 Century Blvd.  
Suite 205  
Nashville, TN 37214  
Contact your local  
Elevate representative.

SHT #: \_\_\_\_\_ of \_\_\_\_\_  
DATE: **06/20/25**  
DRN BY : **PL**  
CKD BY : **MM**  
DWG # : **13012-38961**  
REV: **C**




# ELEVATE WR GUTTER


## OFFSET STANDARD ACCESSORIES

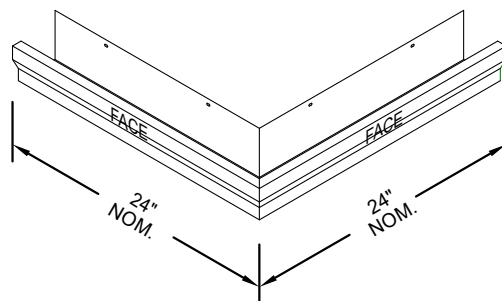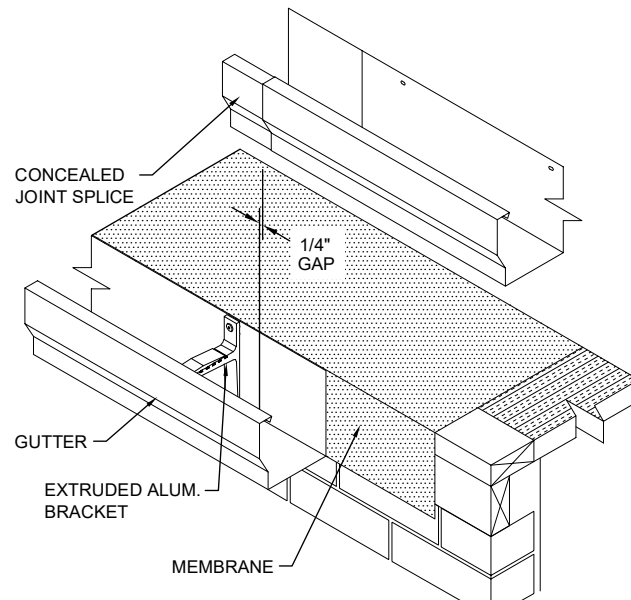

OUTSIDE MITER

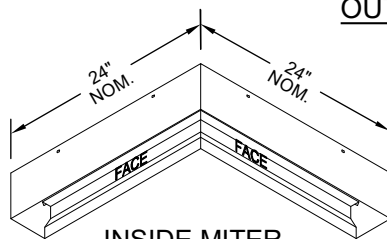


INSIDE MITER



END CAP

LEFT HAND SHOWN

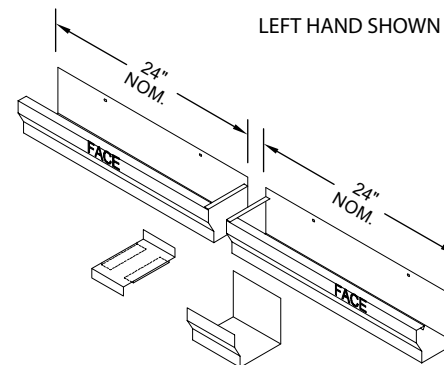

EXPANSION JOINT  
(IF REQUIRED)

Standard gutter miter leg lengths are 24" Nominal  
Standard gutter miter angle is 90°  
For special miter requirements, attach sketches or consult manufacturer for assistance.

**Elevate**  
26 Century Blvd.  
Suite 205  
Nashville, TN 37214  
Contact your local  
Elevate representative.

SHT #: \_\_\_\_ of \_\_\_\_

DATE: **06/20/25**

DRN BY : **PL**

CKD BY : **MM**

DWG # : **13012-38960**

REV: **C**