SECUREDGE DRIP EDGE

KYNAR WITH CONTINUOUS CLEAT

FACE HEIGHT 6” OR LESS

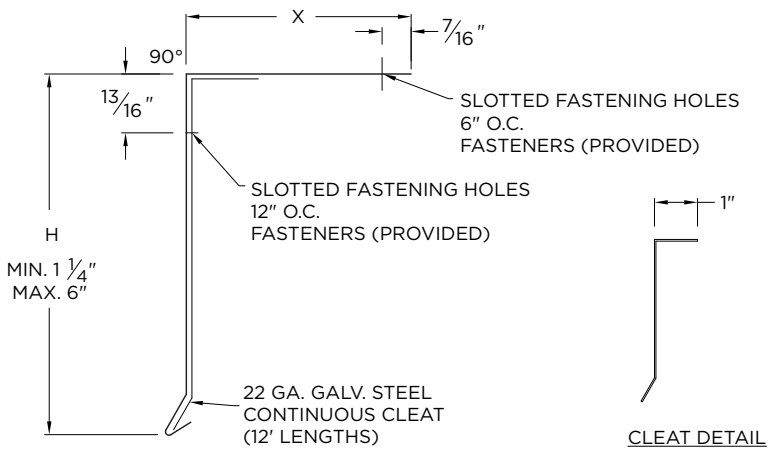

FACE HEIGHT OVER 6”

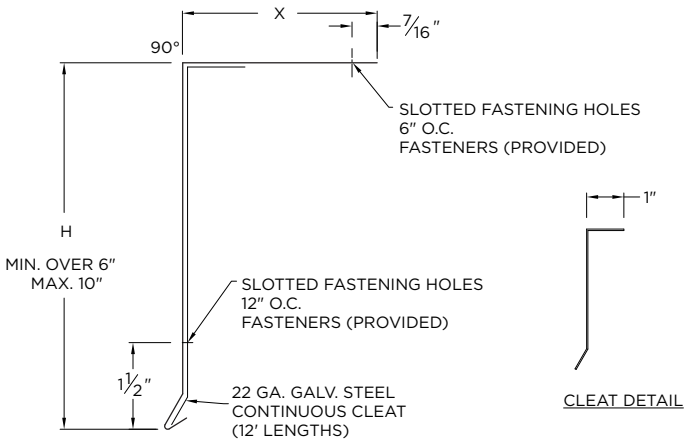

NOTES

- Includes concealed splice plates that must be field caulked to prevent water entry
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.
- Welded accessories require a minimum material thickness of .050"
- For non 90-degree angle, see separate print approval
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 282 psf

APPROVALS

MIAMI-DADE COUNTY APPROVED

FM APPROVED

ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

DIMENSIONS

☐ (H) Face Height (inches-Max 10”)

☐ (X) Flange Size (inches)

MATERIAL

☐ 24 Ga. Galv. Steel
☐ 22 Ga. Galv. Steel
☐ .040” Aluminum
☐ .050” Aluminum
☐ .063” Aluminum
☐ OTHER:

Color:
Finish:

Substrate:
If substrate is not given, wood fasteners will be provided.

☐ Wood
☐ Masonry
☐ Metal

QUANTITIES

☐ Lineal Feet (12’-0” Lengths)

☐ Outside Miter (90°)

☐ Inside Miter (90°)

Accessory Type:
☐ Quicklock (Default)
☐ Welded (Surcharge)

PROJECT INFO

Project Name:

Architect:

Roofing Contractor:

Project Type:

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date:

Customer Service
866-458-3537
(Metal-Era)

SHT #: _____ of _____

DATE: **09/24/25**

DRN BY: **JJC**

CKD BY: **MM**

DWG #: 15010-1669

REV: **H**