



FLEXLOCK FLS RADIUS ROOF EDGE

BUILT-UP OR MODIFIED VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:

1.) THE ACTUAL KNOWN RADIUS IS


' FEET " INCHES

MINIMUM OF 13'-0"
(CALL IF LESS)

OR


2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

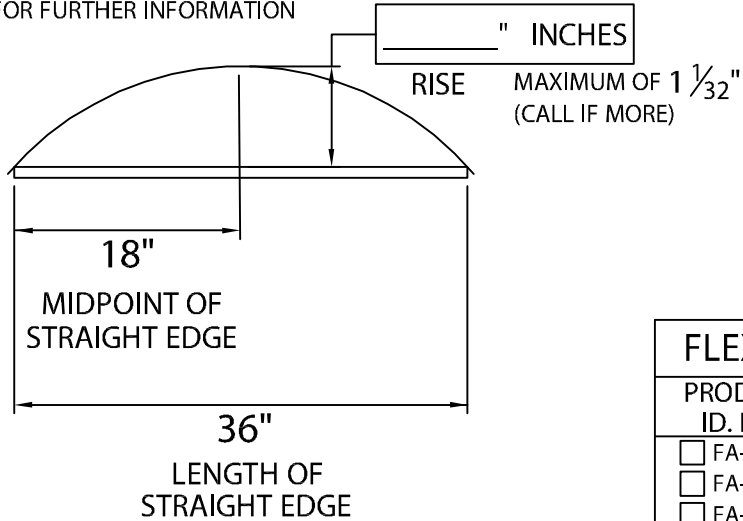

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

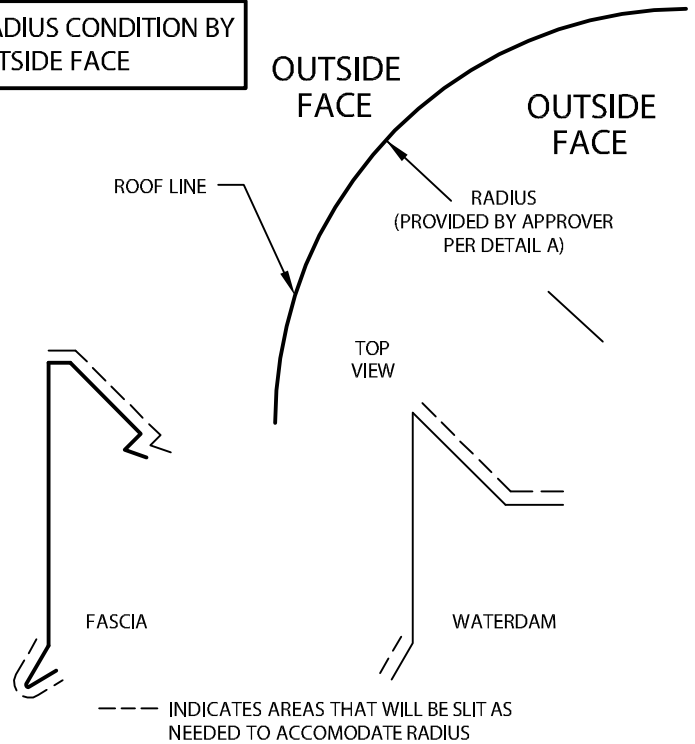

FLEXLOCK FLS RADIUS ROOF EDGE DIMENSIONS

| PRODUCT ID. NO. | H DIM | X DIM | NAILER COVERAGE |
|---------------------------------|---------|---------|-----------------|
| <input type="checkbox"/> FA-55 | 5 1/4" | 2 7/8" | 1 NAILER |
| <input type="checkbox"/> FA-65 | 6 3/4" | 4 3/8" | 2 NAILERS |
| <input type="checkbox"/> FA-80 | 8 1/4" | 5 7/8" | 3 NAILERS |
| <input type="checkbox"/> FA-95 | 9 3/4" | 7 3/8" | 4 NAILERS |
| <input type="checkbox"/> FA-110 | 11 1/4" | 8 7/8" | 5 NAILERS |
| <input type="checkbox"/> FA-125 | 12 3/4" | 10 3/8" | 6 NAILERS |

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Flex's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

_____ 24 GA. GALV. STEEL*
 OIL CANING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND _____ .040" ALUMINUM
 _____ .050" ALUMINUM
 _____ .063" ALUMINUM
 _____ OTHER: _____

COLOR: _____

FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service:

Phone: 800-969-0108

Fax: 610-916-9501



DATE: 11/15/16

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 28010-11362

G