




SECUREDGE SYSTEM 200 RADIUS FASCIA

SINGLE-PLY APPLICATION, CRIMP-ON VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS



OR

2.) FIELD CONDITION MEASUREMENTS



NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

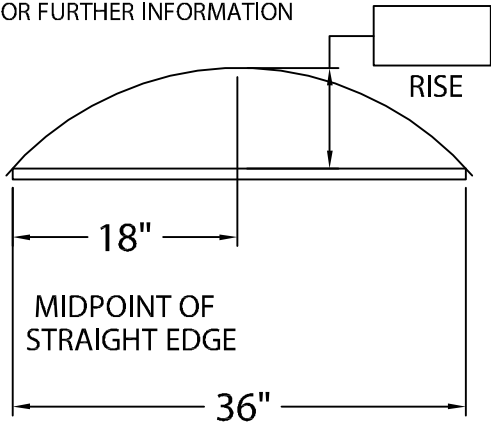


LENGTH OF
STRAIGHT EDGE

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

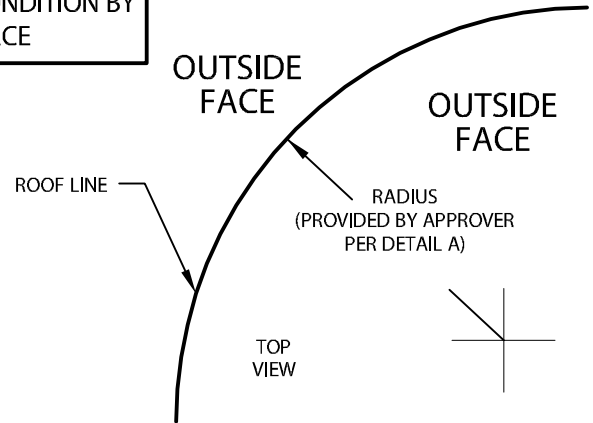

FASCIA



WATERDAM

--- INDICATES AREAS THAT WILL BE SLIT AS
NEEDED TO ACCOMMODATE RADIUS

SECUREDGE SYSTEM 200 RADIUS FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> FA-50	5"	3"	1 NAILER
<input type="checkbox"/> FA-65	6.5"	4.5"	2 NAILERS
<input type="checkbox"/> FA-80	8"	6"	3 NAILERS
<input type="checkbox"/> FA-95	9.5"	7.5"	4 NAILERS
<input type="checkbox"/> FA-110	11"	9"	5 NAILERS
<input type="checkbox"/> FA-125	12.5"	10.5"	6 NAILERS

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Carlisle SynTec, Inc.'s printed instructions.

Approved by: _____

Date: _____

MATERIAL:

_____ 24 GA. GALV. STEEL*
 OIL CANING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .040" ALUMINUM
 _____ .050" ALUMINUM
 _____ .063" ALUMINUM
 _____ OTHER: _____

COLOR: _____

FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service
866-458-3537
(Metal-Era)



DATE: 11/01/16

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 15010-16970

B