


_EXLOCK FLT EXTENDED ROO

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF 146 psf

.050" AND .063" MATERIAL

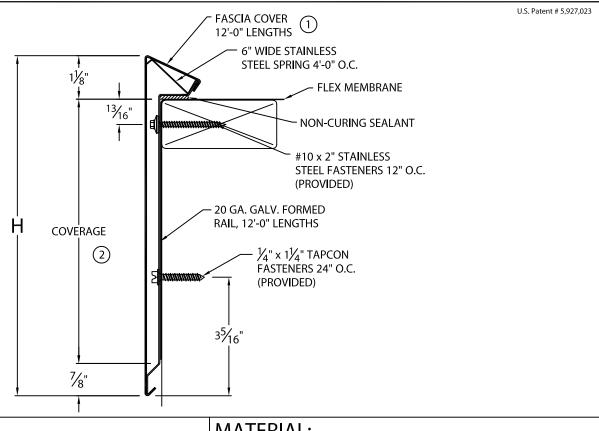

NOTES:

- (1) FASCIA COVER PROVIDED WITH 31/2" WIDE SPLICE PLATES.
- (2) FACE = COVERAGE (SHOULD EXTEND A MIN. OF 1" BELOW WATERPROOFING MEMBRANE) + 2".

FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	COVERAGE	
☐ ESE-S95	9 1/2"	8 3/8"	
☐ ESE-S110	11"	9 7/8"	
☐ ESE-S125	12 1/2"	11 3/8"	

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Flex's printed instructions.

Approved by:	

١л	ΙΛ	П		וט	Α	
V١	-		ᆫ	N	$\boldsymbol{\Gamma}$	∟.

___ .050" ALUM**I**NUM ____ .063" ALUMINUM

____ OTHER ____

COLOR: FINISH:_

QUANTITIES:
LINEAL FEET 12'-0" LENGTHS
OUTSIDE MITERS (COVER ONLY) @ 90°
INSIDE MITERS (COVER ONLY) @ 90°
OVERFLOW SCUPPER STYLEAB
SPILLOUT SCUPPER STYLEAB
DOWNSPOUT SCUPPER STYLEAB
(x) SIZE A: TAPERED 1 1/2" DROP B: FLAT
FOR NON-90 MITERS SEE PRINT APPROVAL #28010-3436

PROJECT:

Date:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Fax: 610-916-9501

DATE: 10/16/18

Customer Service:

Phone: 800-969-0108

SHT.# OF

DRN BY: JJC CKD BY: SAK

DWG# 28010-11797

