




SOPREMA PERMA-TITE SYSTEM 200 FASCIA

SINGLE-PLY APPLICATION, SNAP-ON VERSION

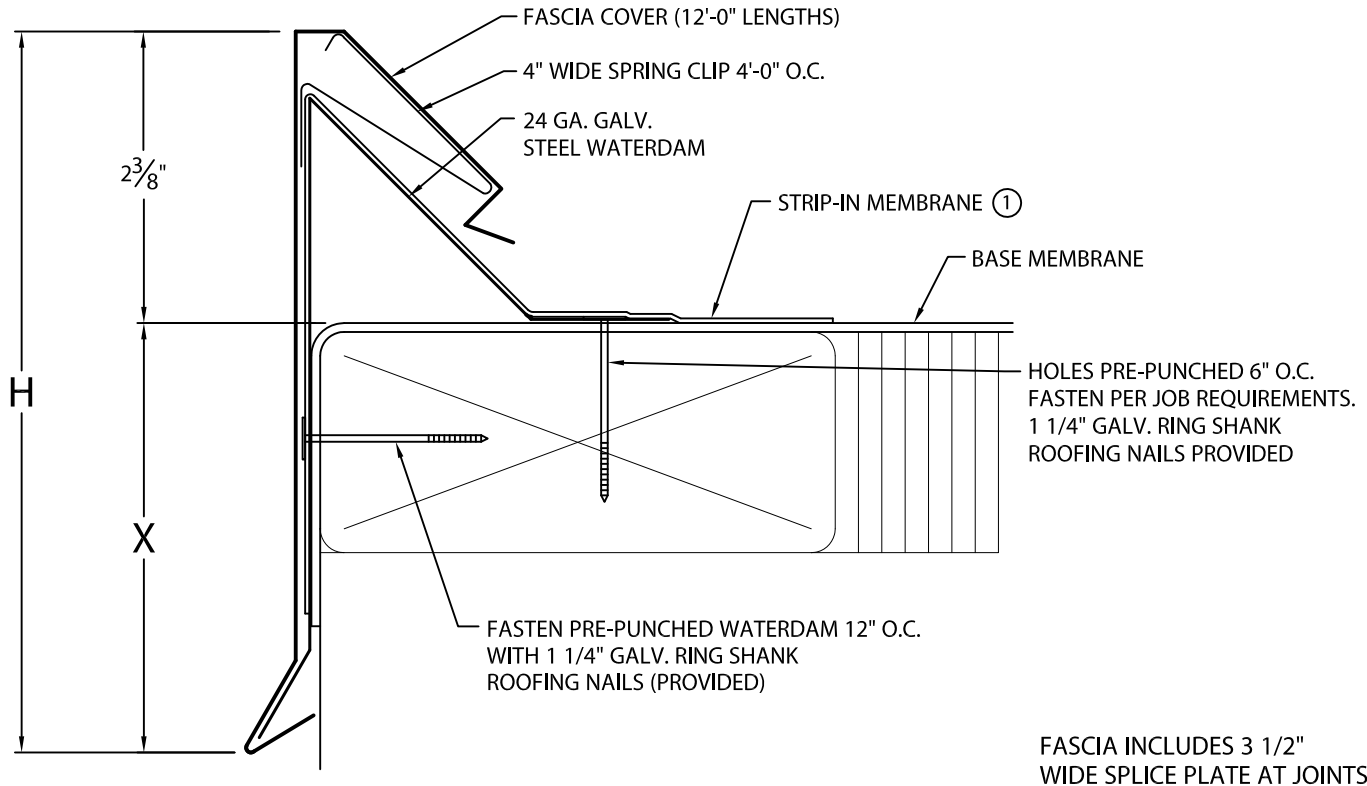

- ① STANDARD FASCIA WILL NOT FUNCTION WITH TPO OR PVC STRIP-IN MEMBRANE THICKER THAN .060".
- ② OIL CANNING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR FACE HEIGHTS ABOVE 8 3/4"
- ③ WELDED ACCESSORIES REQUIRE A MINIMUM OF MATERIAL THICKNESS OF .050"

NOTE: -- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD.

SOPREMA PERMA-TITE SYSTEM 200 FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ FA-50	5 1/4"	2 7/8"	1 NAILER
☐ FA-65	6 3/4"	4 3/8"	2 NAILERS
☐ FA-80	8 1/4"	5 7/8"	3 NAILERS
☐ FA-95	9 3/4"	7 3/8"	4 NAILERS
☐ FA-110	11 1/4"	8 7/8"	5 NAILERS
☐ FA-125	12 3/4"	10 3/8"	6 NAILERS

FA-50 TO FA-80 ANSI/SPRI ES-1 DESIGN PRESSURE OF 160 psf

FA-95 TO FA-125 ANSI/SPRI ES-1 DESIGN PRESSURE OF 110 psf

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

MATERIAL:

___ 24 GA. GALV. STEEL ② ___ .050" Alum.
___ .040" ALUMINUM ② ___ .063" Alum.
___ OTHER _____

COLOR: _____ FINISH: _____

QUANTITIES:

___ LINEAL FEET 12'-0" LENGTHS
___ OUTSIDE MITER(S) @ (___°)
___ INSIDE MITER(S) @ (___°) SPECIFY ACCESSORY TYPE:
___ RIGHT ENDCAP(S) ☐ WELDED ③
___ LEFT HANDCAP(S) ☐ STANDARD
___ RIGHT ENDWALL FLASHING(S)
___ LEFT ENDWALL FLASHING(S)
___ OVERFLOW SCUPPER(S) STYLE ___ A ___ B
___ SPILLOUT SCUPPER(S) STYLE ___ A ___ B
___ DOWNSPOUT SCUPPER(S) STYLE ___ A ___ B
(___X___) SIZE A: TAPERED 1 1/2" DROP
 B: FLAT

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

800-356-3521
www.soprema.us

310 Quadral Dr. Wadsworth, OH 44281
f: 330-334-6257

DATE: 03/03/16
DRN BY: JAB
CKD BY: SAK

SHT.# ___ OF ___

DWG# 33010-21816

C