

REPRESENTATIVE/DISTRIBUTOR:

CUSTOMER SERVICE

FAX: 610-916-9501

PHONE: 800-969-0108



FLEXLOCK FLS ROOF EDGE

BUILT-UP OR MODIFIED APPLICATION, SNAP-ON VERSION


DATE: 09/30/16

DRN BY: JJC

CKD BY: SAK

SHT.#___ OF __

DWG# 28010-11354

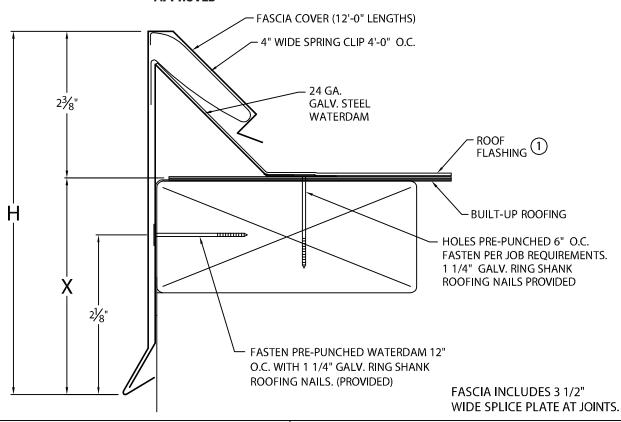

(1) STANDARD FASCIA WILL NOT FUNCTION WITH ROOF FLASHING THICKER THAN $\frac{3}{16}$ ".					MATERIAL:		
OIL CANNING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR FACE HEIGHTS ABOVE 8½" WELDED ACCESSORIES REQUIRE A MINIMUM OF MATERIAL THICKNESS OF .050" NOTE: — UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD.					24 GA. GALV. STEEL ②050" ALUMINUM040" ALUMINUM ②063" ALUMINUM OTHER COLOR: FINISH:		
FLEXLOCK FLS ROOF EDGE DIMENSIONS					QUANTIT	-	•
PRODUCT ID. NO. FA-350 FA-365 FA-380 FA-395 FA-3110 FA-3125 ANSI/SPRI/FM DESIGN PRESS	1 4435/ ES-1 FA-50 TC SURE FA-50 TC		X DIM 2 7/8" 4 3/8" 5 7/8" 7 3/8" 8 7/8" 10 3/8" D FA-80 IN 24 GA. OR D FA-80 IN .050 OR .0	163" - 216 psf	OUNISIRIGRIGRIGRIGRIGCOVE	LINEAL FEET 12'-0" LEN TSIDE MITER(S) @ 90° IDE MITER(S) @ 90° HT ENDCAP(S) T ENDCAP(S) HT ENDWALL FLASHING T ENDWALL FLASHING(S	SPECIFY ACCESSORY TYPE: WELDED ③ STANDARD (S) TYLEAB
AUTHORIZED SIGNATURE: APPROVED BY: DATE:					SPILLOUT SCUPPER(S) STYLEABDOWNSPOUT SCUPPER(S) STYLEAB (X) SIZE A: TAPERED 1 1/2" DROP B: FLAT FOR NON-90 MITERS SEE PRINT APPROVAL #28010-3436		
PROJECT:							
ARCHITECT:							
ROOFING CON	NTRACTOR:						