



COPING TRANSITION MITERS

90° MITERS

OUTSIDE MITER

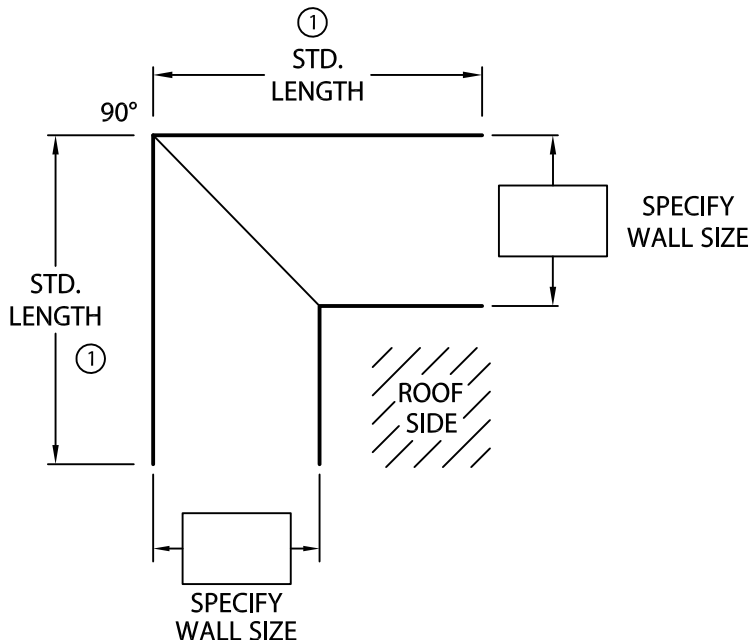


INSIDE MITER

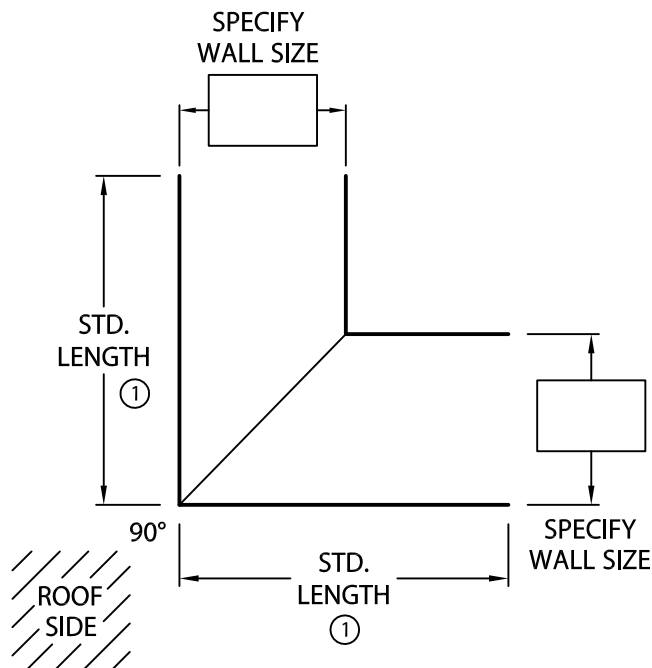

FOR CUSTOM LEG LENGTHS MODIFY DRAWINGS ABOVE

NOTES:

- ① THE STANDARD LEG LENGTH FOR COPING WITH A DRIP IS THE LARGER WALL SIZE + $9\frac{5}{8}$ ".
 THE STANDARD LEG LENGTH FOR COPING WITH A FLUSH FACE IS THE LARGER WALL SIZE + $10\frac{1}{8}$ ".



- ② WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

MATERIAL:

- 24 GA. GALVANIZED STEEL
 22 GA. GALVANIZED STEEL
 .040" ALUMINUM
 .050" ALUMINUM
 .063" ALUMINUM
 OTHER _____
- COLOR: _____
 FINISH: _____

QUANTITIES:

- _____ OUTSIDE MITERS @ 90°
 _____ INSIDE MITERS @ 90°
- SPECIFY ACCESSORY TYPE:
 WELDED ②
 QUICKLOCK

FOR NON-90 MITERS SEE PRINT APPROVAL #13011-1270

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



ELEVATE
 26 CENTURY BLVD.
 SUITE 205
 NASHVILLE, TN 37214
 CONTACT YOUR LOCAL ELEVATE REPRESENTATIVE

DATE: 03/17/23
 DRN BY: MLM
 CKD BY: MM

SHT.# _____ OF _____
 DWG# 13011-1271

E