

QUICKLOCK CONCAVE RADIUS COPING


UTILIZING A NON-PENETRATING LOCK SYSTEM

(NO WELDING REQUIRED)

PROVIDING A RADIUS

THE RADIUS MAY BE PROVIDED IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS



OR


2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET FOR FURTHER INFORMATION

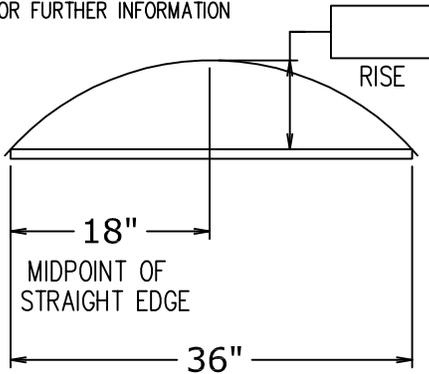

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

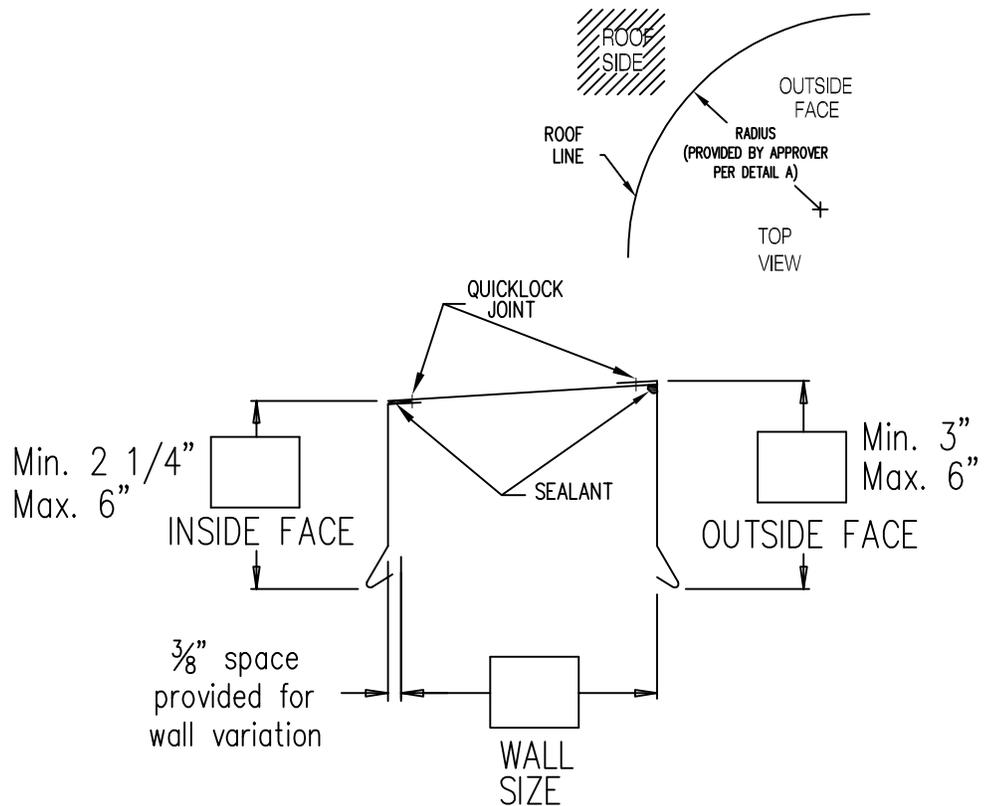

NOTES: -- Concealed splice plates are provided with factory applied dual non-curing sealant strips.

-- Fabrication of radius is furnished utilizing a non-penetrating Quicklock Joint, then factory sealed watertight.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes, and quantities. All products to be installed in strict accordance with Sika Sarnafil printed instructions.

Approved by: _____

Date: _____

QUANTITIES:

_____ Lined Feet (4'-0"
(1.22 m) Lengths)

MATERIALS:

- ___ 24 GA. (.65 mm) Steel
- ___ .040" (1.01 mm) Aluminum
- ___ .050" (1.27 mm) Aluminum
- ___ .063" (1.60 mm) Aluminum
- ___ Other _____
- Color: _____
- Finish: _____
- ___ Smooth ___ Textured (Stucco)

PROJECT

ARCHITECT

ROOFING CONTRACTOR

REPRESENTATIVE/DISTRIBUTOR

Sika Sarnafil Inc.
100 Dan Road
Canton, MA 02021
(800) 451-2504
Fax: (781) 828-5365



DATE: 03/18/03

DRN BY: JWH

CKD BY: SAK

SHT.# _____ OF _____

DWG# 14011-2867 A