



PRESTO-TITE HG RADIUS FASCIA

BUILT-UP OR MODIFIED VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:

1.) THE ACTUAL KNOWN RADIUS IS

_____ ' FEET _____ " INCHES

OR

2.) FIELD CONDITION MEASUREMENTS


FOR FURTHER INFORMATION

_____ " INCHES

RISE

MAXIMUM OF $3 \frac{3}{32}$ "
(CALL IF MORE)


* RADIUS PRODUCT NOT
REQUIRED IF UNDER $\frac{3}{32}$ "

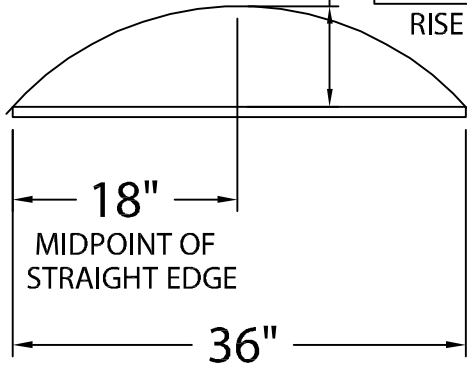

LENGTH OF
STRAIGHT EDGE

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

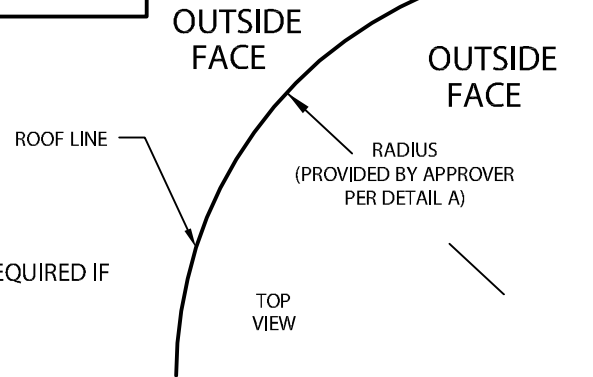

--- INDICATES AREAS THAT WILL BE SLIT AS
NEEDED TO ACCOMMODATE RADIUS

* RADIUS FASCIA PROVIDED
IN 4'-0" LENGTHS IF RADIUS
IS LESS THAN 48'-0".

* RADIUS FASCIA PROVIDED
IN 12'-0" LENGTHS IF
RADIUS IS 48'-0" OR
GREATER.

FLANGE WELDED WHEN RADIUS
IS LESS THAN 48'-0"

* RADIUS EXTRUDED BAR
PROVIDED IN 4'-0" LENGTHS IF
RADIUS IS LESS THAN 48'-0".

* RADIUS EXTRUDED BAR
PROVIDED IN 12'-0" LENGTHS IF
RADIUS IS 48'-0" OR GREATER.

PRESTO-TITE HG RADIUS FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM.	X DIM.	COVERAGE
<input type="checkbox"/> HG-PFM-55	5 1/2"	4 1/4"	2 NAILERS
<input type="checkbox"/> HG-PFM-70	7"	5 3/4"	3 NAILERS

Fabrication will proceed only after receipt of
signed print approval.

Print Approval:

Architect and/or contractor shall verify all
dimensions, sizes and quantities. All products
to be installed in strict accordance with
Johns Manville's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

____ .050" Aluminum

____ .063" Aluminum

____ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet 12'-0" Lengths

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

51 Lexington Street; Lewiston, ME 04240

CUSTOMER SERVICE: 800-223-8317 USA

800-445-1500 Canada

TECHNICAL SERVICE: 800-445-1500 USA & Canada

FAX: 207-784-0125

OTHER AREAS CALL: 207-784-0123



Johns Manville

DATE: 03/21/17

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 16010-5611

D