
DWG# 23010-21589

CKD BY: SAK



800-355-6416



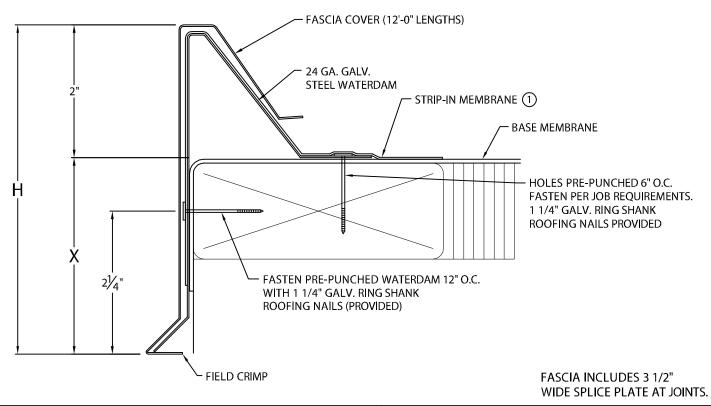

① STANDARD FASCIA WILL NOT FUNCTION WITH TPO OR PVC STRIP-IN MEMBRANE THICKER THAN .060".					MATERIAL:				
② OIL CANNING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR FACE HEIGHTS ABOVE 8"						24 GA. GALV. STEEL ②050" ALU			
3 WELDED ACCESSORIES REQUIRE A MINIMUM OF MATERIAL THICKNESS OF .050"					040" ALUMINUM ②063" ALUMINUM				
NOTE: UNLESS OTHERWISE NOTED, FABRICATION OF MITERS					OTH	IER			
AND ACCESSORIES ARE FURNISHED STANDARD.					COLOR:FINISH:				
FIBERTITE 200 FASCIA DIMENSIONS						QUANTITIES:			
PRODUCT ID. NO.	H DIM		X DIM	NAILER COVERAGE		LINEAL FEET	12'-0" I FNGTH	2'-0" LENGTHS	
☐ FA-50	5"		3"	1 NAILER		OUTSIDE MITER(S) @ 90°			
☐ FA-65	6 1/2" 8"		4 1/2"	2 NAILERS		INSIDE MITER(S) @	•	SPECIFY ACCESSORY TYPE:	
☐ FA-80 ☐ FA-95	8 9 1/2"		6" 7 1/2"	3 NAILERS 4 NAILERS	-	RIGHT ENDCAP(S)			
☐ FA-110	11"		9"	5 NAILERS	· ·	LEFT ENDCAP(S)	<ul><li>□ WELDED ③</li><li>□ STANDARD</li></ul>		
☐ FA-125	12 1/2"		10 1/2"	6 NAILERS	· ·	RIGHT ENDWALL	FLASHING(S)		
ANSI/SPRI/FM 4435/ ES-1 FA-5		FA-50 T	0 TO FA-80 IN 24 GA. OR .040" - 126 psf 0 TO FA-80 IN .050 OR .063" - 196 psf 5 TO FA-125 IN .050 OR .063" - 97 psf			LEFT ENDWALL FLASHING(S) OVERFLOW SCUPPER(S) STYLEAB			
AUTHORIZED SIGNATURE:					SPILLOUT SCUPPER(S) STYLEAB  DOWNSPOUT SCUPPER(S) STYLE A B				
APPROVED BY:					<u></u>	DOWNSPOUT SCI X) SI	Δ.ΤΔΕ	PERED 1 1/2" DROP	
DATE:					FOR NON-90 MITERS SEE PRINT APPROVAL #23010-2417				
PROJECT:									
ARCHITECT:									
ROOFING CO	NTRACTOR:								
REPRESENTATIVE/DISTRIBUTOR:									
CUSTOMER SERV	/ICE					DATE: DRN B	l l	SHT.# OF	