


ELEVATE SEAL-TITE HALF-ROUND GUTTER

VERTICAL FASCIA

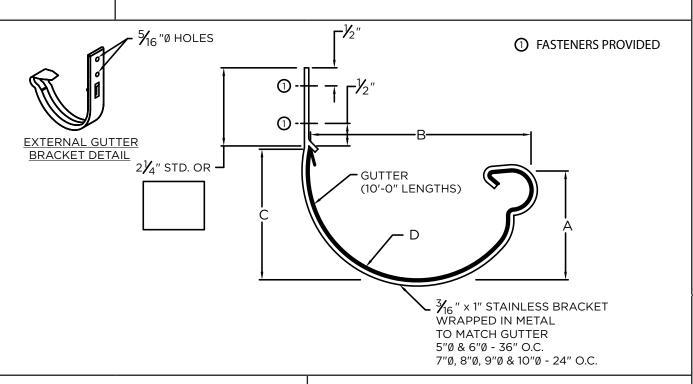

Fill out additional information on the **DIMENSIONS** drawing above. **GUTTER DIAMETER** С D Α В **5**" 3" 5 1/4" 2 1/2" 2 1/2" Radius 6" 6 1/4" 3 1/2" 3" Radius 3" □ 7" 7 1/4" 4" 3 1/2" 3 1/2" Radius 8" 4" 8 1/4" 4 1/2" 4" Radius 9" 9 1/4" 5" 4 1/2" Radius 4 1/2" 10" 10 1/4" 5" 5 1/2" 5" Radius

MATERIAL*	
☐ 24 Ga. Galv. Steel	Color:
22 Ga. Galv. Steel	Finish:
.032" Aluminum	Substrate:
☐.040" Aluminum	If substrate is not
☐.050" Aluminum	will be provided. Masonry
☐ OTHER:	Metal

QUANTITIES			
Lineal Feet (10"-0" Lengths)	Accessory Type*:	Quicklock (Default)	Welded (Surcharge)
Outside Miter (90°)	, .eeeeee. y y pee .		,, e.a.ea (ea. e.ia. ge)
Inside Miter (90°)			
Right Endcaps			
Left Endcaps			
Expansion Joints			
NOTE: ONE EXPANSION JOINT INCLUDES: (2) ENDCAPS. (1) OUTSIDE COVER PLATE AND (1) TOP PLATE	

* NOTES

- .050" provided with splice plates
- 24 ga., 22 ga., .032", .040" all need field notched lap joints
- 5" not available in 22 ga. steel or .050" aluminum
- Stainless steel pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions

DDC) IE	CT	INFO	

PROJECT INFO	
Project Name:	
Architect:	
Roofing Contractor:	
Project Type:	
By selecting this box you have verified and confirmed that dimensions, sizes, and quantit are correct. All products will be	ies

Elevate

Date:

26 Century Blvd. Suite 205 Nashville, TN 37214 Contact your local Elevate representative.

installed in strict accordance with printed instructions.

DRN BY: ____JJC__

DRN BY: _____

CKD BY: MM

DWG #: 13012-26385

F 9J . SSSSSS