


ANCHOR-TITE DRIP EDGE FOR USE WITH ELIMINAILER®-T

3" ELIMINAILER VERSION

FOR USE WITH MASONRY WALL

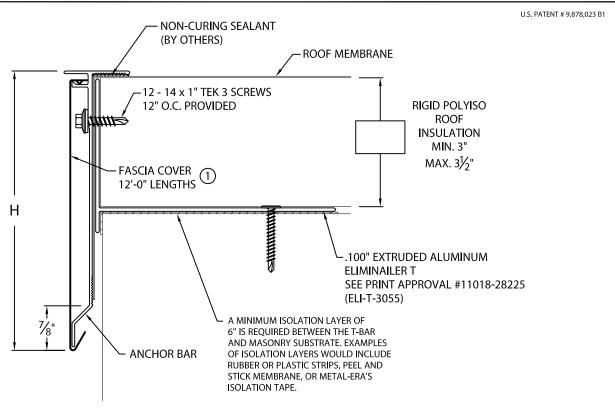

7/8" ANCHOR BAR	ELIMINAILER T SEE PRINT APPROVAL #11018-28225 (ELI-T-3055) A MINIMUM ISOLATION LAYER OF 6" IS REQUIRED BETWEEN THE T-BAR AND MASONRY SUBSTRATE. EXAMPLES OF ISOLATION LAYERS WOULD INCLUDE RUBBER OR PLASTIC STRIPS, PEEL AND STICK MEMBRANE, OR METAL-ERA'S ISOLATION TAPE.
NOTES:	DRIP EDGE COVER MATERIAL:
1) FASCIA COVER PROVIDED WITH 1" LAP JOINTS.	24 GA. GALVANIZED STEEL
ANCHOR-TITE DRIP EDGE DIMENSIONS	040" ALUMINUM
PRODUCT H ID. NO. DIM	OTHER
☐ T-AFDE-45 4½"	COLOR:
☐ T-AFDE-60 6"	FINISH:
☐ T-AFDE-75 7½"	
Fabrication will proceed only after receipt of signed print approval.	QUANTITIES:
Print Approval: Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Metal-Era's printed instructions. Approved by: Date:	LINEAL FEET 12'-0" LENGTHSOUTSIDE MITER(S) @ 90°INSIDE MITER(S) @ 90° FOR NON-90 MITERS SEE PRINT APPROVAL #11010-1103
PROJECT:	
ARCHITECT:	Corporate Offices, Manufacturing 1600 Airport Road; Waukesha, WI 53188
ROOFING CONTRACTOR:	Phone: 800-558-2162
REPRESENTATIVE/DISTRIBUTOR:	Fax: 800-373-9156 www.metalera.com
METAL-ERA® Roof Edge Solutions	DATE: 03/15/18 SHT.# OF DRN BY: JJC CKD BY: SAK DWG#11010-26098 A

ELIMINAILER_®-T

DWG# 11018-28225

CKD BY: SAK

FOR USE WITH MASONRY WALL, 3" VERSION

