



# Engineered Eave Vents


**techni***FLO*<sup>™</sup>  
Engineered Eave Vents



## ENGINEERED INTAKE *for* MAXIMUM AIRFLOW

The Techni-Flo<sup>™</sup> EV (eave vent) features a unique design that creates airflow to the eave, limiting heat build-up, helping to evacuate moisture, thereby ensuring a longer roof system life. Pre-slotted fastening holes on the roof flange and cover allow for thermal movement, as well as ensure proper fastening location.

The Techni-Flo<sup>™</sup> EV is just one part of the Techni-Flo<sup>™</sup> Engineered Ventilation System. When combined with the Techni-Flo<sup>™</sup> RV and CrossVent<sup>™</sup> Nailable Polyiso insulation, creates a state-of-the-art ventilation system, specifically designed to create consistent air intake and exhaust under the roof covering, all based on the design conditions of the project. Properly designed and engineered ventilation through the roof system is essential for roof system durability in both commercial and residential steeped-sloped roofing systems.

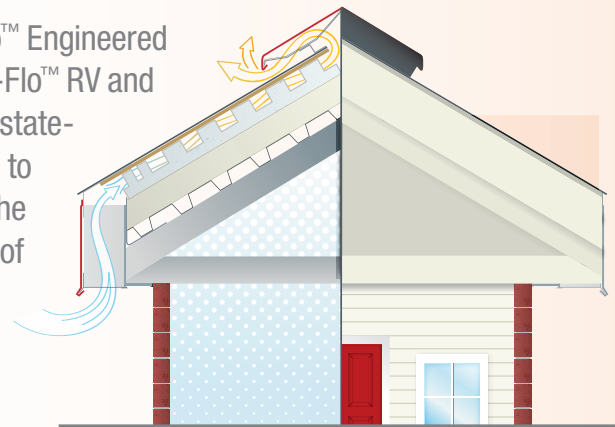

[www.AtlasRoofing.com/Ventilation](http://www.AtlasRoofing.com/Ventilation)



## FEATURES & BENEFITS:

### Product Versatility –

- Available in standard or custom sizes
- Custom Colors Available
- Alternative materials, such as cedar exterior laminates, can be used in lieu of metal

### Cost Saving Benefits –


- Eliminates the need for overhangs and vented soffits, reducing extra labor costs
- Pre-slotted fastening holes on roof flange and cover allow for thermal movement and ensure proper fastening location
- Provided in 12' lengths for faster installation and fewer splice joints

### Comprehensive Warranty –

- Ridge and eave vents will withstand winds up to 120mph
- Vents will be manufactured free of any defects
- Finish will not fade or crack. Covers repair or replacement of the ridge and eave for 20 years
- Vents will continue to provide designed ventilation for the duration of the warranty\*

\*See the warranty for terms and conditions

*Techni-Flo™ EV is not intended for attachment to open ended metal truss or metal bar joist applications.*

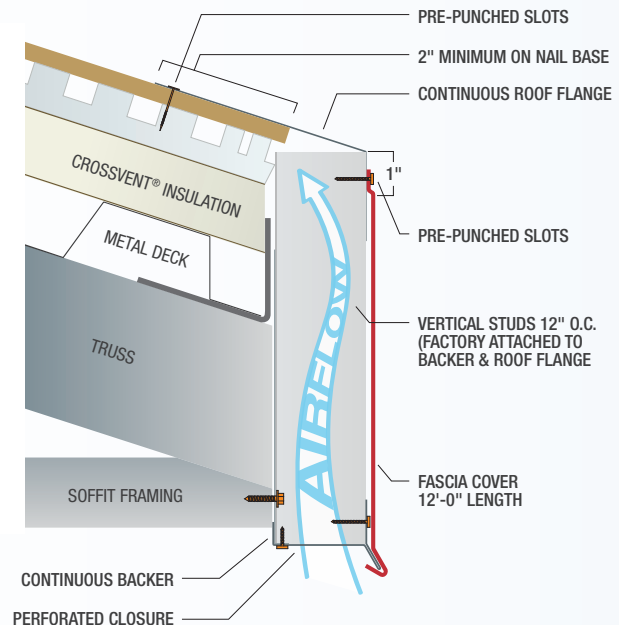

The above diagram shows the components of the Techni-Flo™ EV. Proper installation is required to achieve optimal airflow through the eave and to maintain warranty coverage. Go to [www.AtlasRoofing.com](http://www.AtlasRoofing.com) for further installation instructions.

## OTHER PRODUCTS IN THE TECHNI-FLO™ VENTILATION SYSTEM:

**techniFLO™**  
Engineered Ridge Vents

Engineered Ridge Vent designed to create consistent exhaust for maximum airflow.




**CROSSVENT®**

Cross Ventilating nailable polyiso insulation.

**CROSSVENT®  
RB**

Cross Ventilating nailable polyiso insulation with a radiant barrier.



*One System. One Manufacturer.*

**ATLAS®**  
ROOFING  
CORPORATION  
[www.AtlasRoofing.com](http://www.AtlasRoofing.com)

For Specifications, CAD Details, and Additional Product Information:  
[www.AtlasRoofing.com/Ventilation](http://www.AtlasRoofing.com/Ventilation)  
Toll free number (855) 542-0918