2 PC COUNTERFLASHING
REGLET AND SURFACE VERSION

SEALANT (BY OTHERS)

9⁄32" x 3⁄8"
SLOTTED HOLES
12" O.C.
(FASTENERS BY OTHERS)

1½"

CFW2-350R ☐ 3½"

CFW2-400R ☐ 4"

CFW2-500R ☐ 5"

ROOF MEMBRANE

SEALANT
(BY OTHERS)

3⁄8"

3⁄4"

1"

CFR2-350R ☐ 3½"

CFR2-400R ☐ 4"

CFR2-500R ☐ 5"

ROOF MEMBRANE
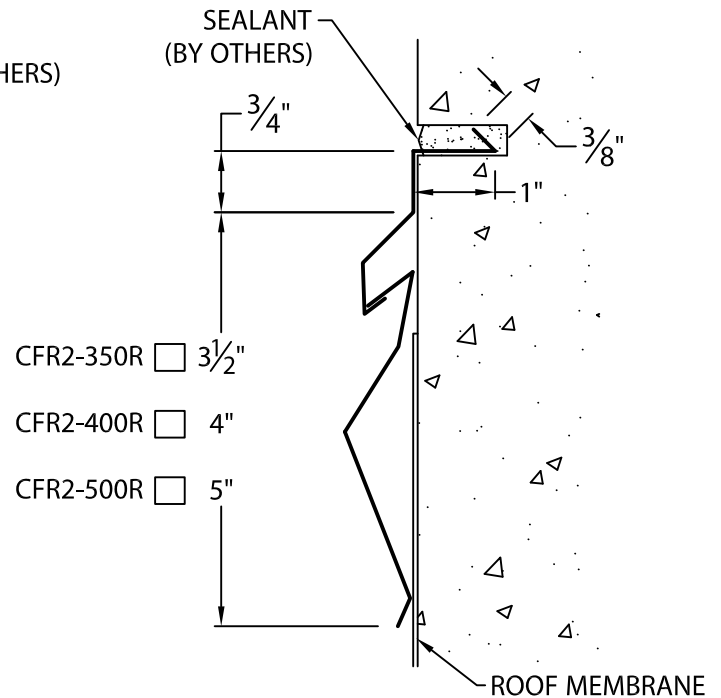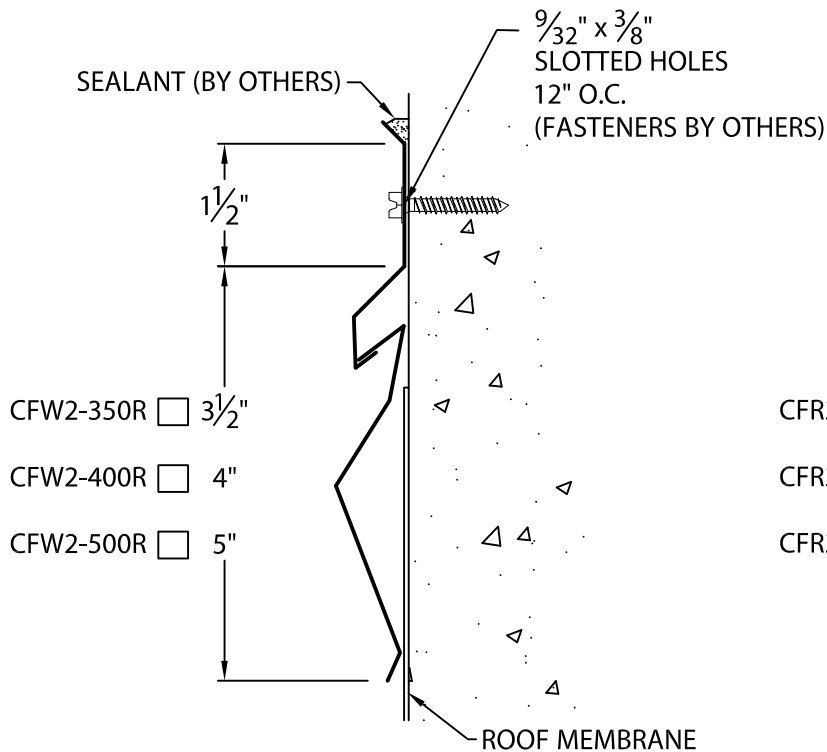
NOTE: PRE-NOTCHED LAP JOINT 3"

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with with Versico, Inc.'s printed instructions.

Approved by: _____

Date: _____

MATERIAL:

___ 24 GA. GALVANIZED STEEL

___ .040" ALUMINUM   COLOR:_____

___ .050" ALUMINUM   FINISH:_____

___ OTHER _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

VERSICO
ROOFING SYSTEMS

Customer Service
800-558-2162
(Metal-Era)

DATE: 02/17/17

DRN BY: JAB

CKD BY: SAK

SHT.#___ OF ___

DWG# 18015-24499 B