

NOTES:

- ① ANCHOR CLIP PROFILE ON WALLS 14" AND GREATER.
- ② FACE = COVERAGE (SHOULD EXTEND A MIN. OF 1" BELOW WATERPROOFING MEMBRANE) + $1\frac{9}{16}"$.
- ③ 24 GA. GALV. AND .040" ALUM. COPING COVERS AVAILABLE FOR WALL SIZES $3\frac{1}{2}"$ TO 24" ONLY. FOR WIDER WIDTHS CONSULT MALARKEY TECHNICAL SERVICES.
- ④ FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.
- ⑤ FOR NON 90° MITERS PLEASE USE PRINT APPROVAL #47011-21257.

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____



ANSI/SPRI ES-1 TESTED

MATERIAL:

____ 24 GA. GALVANIZED STEEL ③ ____ .040" ALUMINUM ③
 ____ 22 GA. GALVANIZED STEEL ____ .050" ALUMINUM
 ____ OTHER ____ .063" ALUMINUM
 COLOR: _____ FINISH: _____

QUANTITIES:

____ LINEAL FEET 12'-0" LENGTHS

ACCESSORIES:

____ OUTSIDE MITERS @ 90° ⑤
 ____ INSIDE MITERS @ 90° ⑤
 ____ RIGHT ENDCAPS
 ____ LEFT ENDCAPS
 ____ RIGHT ENDWALL (COPING VERSION)
 ____ LEFT ENDWALL (COPING VERSION)
 ____ RIGHT ENDWALL (SPLICE PLATE VERSION)
 ____ LEFT ENDWALL (SPLICE PLATE VERSION)

SPECIFY ACCESSORY TYPE:
☐ WELDED ④
☐ QUICKLOCK

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

PHONE: 800-794-2701

DATE: 03/07/19


DRN BY: ZS

CKD BY: SAK


SHT.# ____ OF ____

DWG# 47011-21243

F

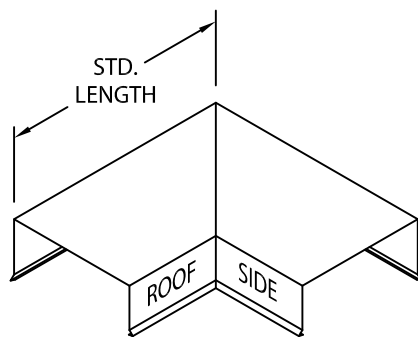


OUTSIDE MITER

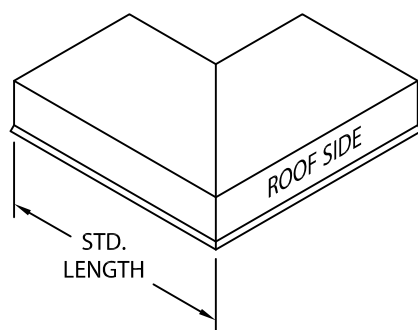


INSIDE MITER

MITER STANDARD LEG LENGTH:
WALL SIZE + $9\frac{5}{8}$ " = LENGTH


ENDURA™-COPE STANDARD ACCESSORIES



ENDCAP
(LEFT HAND SHOWN)

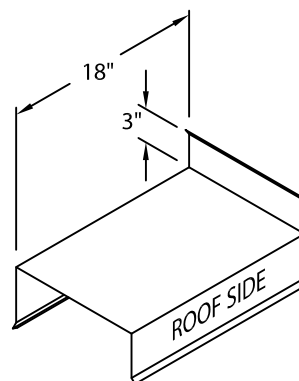

ENDWALL FLASHING
COPING VERSION
(RIGHT HAND SHOWN)

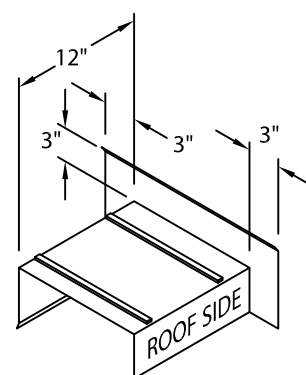

ENDWALL FLASHING
SPLICE PLATE VERSION
(RIGHT HAND SHOWN)
(AVAILABLE ONLY IN
.040" WELDED, PAINTED
TO MATCH COPING)

ADDITIONAL ACCESSORIES ARE AVAILABLE ON WEBSITE:

TRANSITION MITERS

STRAIGHT TRANSITION MITERS

"T" MITERS

"Z" MITERS

STEP-UP MITERS

PEAK / VALLEY MITERS

PILASTER CAPS

RADIUS COPING

ARCHED COPING

(FOR ADDITIONAL ACCESSORY REQUIREMENTS, ATTACH SKETCHES OR CALL MANUFACTURER FOR ASSISTANCE).

ANCHOR CLIP SPACING:

24 GA. / .040", 16" WALL SIZE OR LESS, ANCHOR CLIPS ARE 48" O.C.

24 GA. / .040", OVER 16" WALL SIZE, ANCHOR CLIPS ARE 36" O.C.

22 GA. / .050" / .063", $26\frac{1}{2}$ " WALL SIZE OR LESS, ANCHOR CLIPS ARE 48" O.C.

22 GA. / .050" / .063", OVER $26\frac{1}{2}$ " WALL SIZE, ANCHOR CLIPS ARE 36" O.C.

FLORIDA JOBS HAVE ANCHOR CLIPS 36" O.C. FOR ALL WALL SIZES.

ANCHOR CLIP MATERIAL IS 20 GA. GALV. FOR ALL WALL SIZES UP TO $26\frac{1}{2}$ ".

16 GA. GALV. FOR ALL WALL SIZES GREATER THAN $26\frac{1}{2}$ "

| | | | |
|---------------------|----------------|--------------------|---|
| PHONE: 800-794-2701 | DATE: 03/07/19 | SHT.# ____ OF ____ | |
| | DRN BY: ZS | DWG# 47011-21243 | F |
| | CKD BY: SAK | | |